

United
States
of
America



To Promote the Progress



of Science and Useful Arts

The Director

of the United States Patent and Trademark Office has received an application for a patent for a new and useful invention. The title and description of the invention are enclosed. The requirements of law have been complied with, and it has been determined that a patent on the invention shall be granted under the law.

Therefore, this United States

Patent

grants to the person(s) having title to this patent the right to exclude others from making, using, offering for sale, or selling the invention throughout the United States of America or importing the invention into the United States of America, and if the invention is a process, of the right to exclude others from using, offering for sale or selling throughout the United States of America, products made by that process, for the term set forth in 35 U.S.C. 154(a)(2) or (c)(1), subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b). See the Maintenance Fee Notice on the inside of the cover.



Katherine Kelly Vidal



DIRECTOR OF THE UNITED STATES PATENT AND TRADEMARK OFFICE

Maintenance Fee Notice

If the application for this patent was filed on or after December 12, 1980, maintenance fees are due three years and six months, seven years and six months, and eleven years and six months after the date of this grant, or within a grace period of six months thereafter upon payment of a surcharge as provided by law. The amount, number and timing of the maintenance fees required may be changed by law or regulation. Unless payment of the applicable maintenance fee is received in the United States Patent and Trademark Office on or before the date the fee is due or within a grace period of six months thereafter, the patent will expire as of the end of such grace period.

Patent Term Notice

If the application for this patent was filed on or after June 8, 1995, the term of this patent begins on the date on which this patent issues and ends twenty years from the filing date of the application or, if the application contains a specific reference to an earlier filed application or applications under 35 U.S.C. 120, 121, 365(c), or 386(c), twenty years from the filing date of the earliest such application (“the twenty-year term”), subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b), and any extension as provided by 35 U.S.C. 154(b) or 156 or any disclaimer under 35 U.S.C. 253.

If this application was filed prior to June 8, 1995, the term of this patent begins on the date on which this patent issues and ends on the later of seventeen years from the date of the grant of this patent or the twenty-year term set forth above for patents resulting from applications filed on or after June 8, 1995, subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b) and any extension as provided by 35 U.S.C. 156 or any disclaimer under 35 U.S.C. 253.



US011856942B2

(12) **United States Patent**
Crenshaw

(10) **Patent No.:** **US 11,856,942 B2**
(45) **Date of Patent:** ***Jan. 2, 2024**

(54) **DUAL NOZZLE SPRAYER**

(71) Applicant: **Kenneth D. Crenshaw**, Bartlett, TN (US)

(72) Inventor: **Kenneth D. Crenshaw**, Bartlett, TN (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 170 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **17/215,593**

(22) Filed: **Mar. 29, 2021**

(65) **Prior Publication Data**
US 2021/0212309 A1 Jul. 15, 2021

Related U.S. Application Data

(63) Continuation of application No. 15/729,062, filed on Oct. 10, 2017, now Pat. No. 10,973,219, which is a (Continued)

(51) **Int. Cl.**
A01M 7/00 (2006.01)
B05B 9/01 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **A01M 7/0046** (2013.01); **B05B 1/1609** (2013.01); **B05B 1/1636** (2013.01);
(Continued)

(58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,331,465 A 2/1920 Barrett
2,462,262 A 2/1949 Gustafsson et al.
(Continued)

FOREIGN PATENT DOCUMENTS

EP 1930083 A2 6/2008
JP 2013066823 A 4/2013
(Continued)

OTHER PUBLICATIONS

Canada Intellectual Property Office: Office Action for corresponding Canadian Patent Application No. 3,012,687 dated Oct. 11, 2019, 3 pages.


(Continued)

Primary Examiner — Tuongminh N Pham
(74) *Attorney, Agent, or Firm* — Bradley Arant Boult Cummings; Alex H. Huffstutter

(57) **ABSTRACT**

A fluid spray apparatus includes at least one inlet and first and second outlets. A first actuator may communicate a first inlet with one of the outlets. A second actuator also may communicate a second inlet with a different one of the outlets. A passage network of the fluid spray apparatus communicates the first and second actuators with the first and second outlets. A diverter structure is disposed in the passage network. The diverter structure includes a first diverter structure arrangement. In the first diverter structure arrangement, the first actuator communicates the first inlet with the first outlet and the second actuator communicates the second inlet with the second outlet. The diverter structure also includes a second diverter structure arrangement. In the second diverter structure arrangement, the first actuator communicates the first inlet with the second outlet and the second actuator communicates the second inlet with the first outlet.

19 Claims, 20 Drawing Sheets

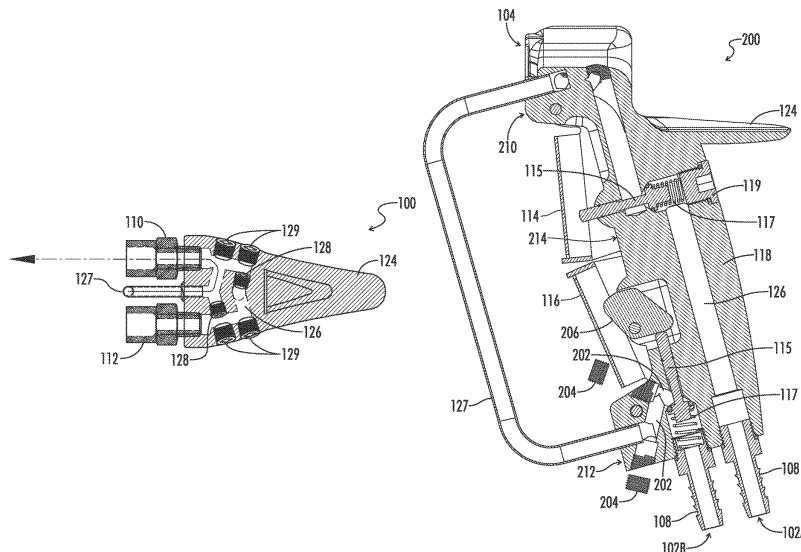

Related U.S. Application Data

continuation of application No. 15/042,360, filed on Feb. 12, 2016, now Pat. No. 9,814,227.

(51) **Int. Cl.**

B05B 12/00 (2018.01)
B05B 1/16 (2006.01)
B05B 1/30 (2006.01)

(52) **U.S. Cl.**

CPC **B05B 1/3013** (2013.01); **B05B 9/01** (2013.01); **B05B 12/002** (2013.01)

(56)

References Cited

U.S. PATENT DOCUMENTS

2,726,898 A 12/1955 Henriksson
 D183,070 S 6/1958 Stillson
 2,969,926 A 1/1961 Peeps
 3,511,951 A 5/1970 Miller
 4,005,824 A * 2/1977 Becker B05B 7/1209
 239/289
 4,915,304 A 4/1990 Campani
 5,221,026 A * 6/1993 Williams B05B 7/24
 222/401
 5,236,129 A 8/1993 Grime et al.
 5,979,800 A 11/1999 Takagi
 6,042,029 A 3/2000 Massey
 6,595,440 B2 7/2003 Moriarty et al.

6,685,107 B1 * 2/2004 Salzman B05B 7/244
 239/526
 7,568,636 B2 8/2009 Saunders et al.
 9,814,227 B2 11/2017 Crenshaw
 2002/0158143 A1 10/2002 Moriarty et al.
 2004/0227014 A1 11/2004 Williams et al.
 2005/0217652 A1 * 10/2005 Styles F41B 11/68
 124/32
 2006/0272628 A1 12/2006 Styles
 2007/0194148 A1 * 8/2007 Rosko B05B 1/3402
 239/526
 2011/0121105 A1 5/2011 Moriarty et al.
 2012/0043364 A1 2/2012 Coleman, Jr.
 2014/0042238 A1 2/2014 Mather et al.
 2014/0217120 A1 8/2014 Berry
 2014/0239094 A1 8/2014 Munro
 2018/0027798 A1 2/2018 Crenshaw

FOREIGN PATENT DOCUMENTS

KR 101502743 B1 3/2015
 WO 2005018814 A2 3/2005
 WO 2017139135 A1 8/2017

OTHER PUBLICATIONS

European Patent Office: Extended European search report for corresponding European Application No. 17750579.9 dated Sep. 2, 2019, 8 pages.

* cited by examiner

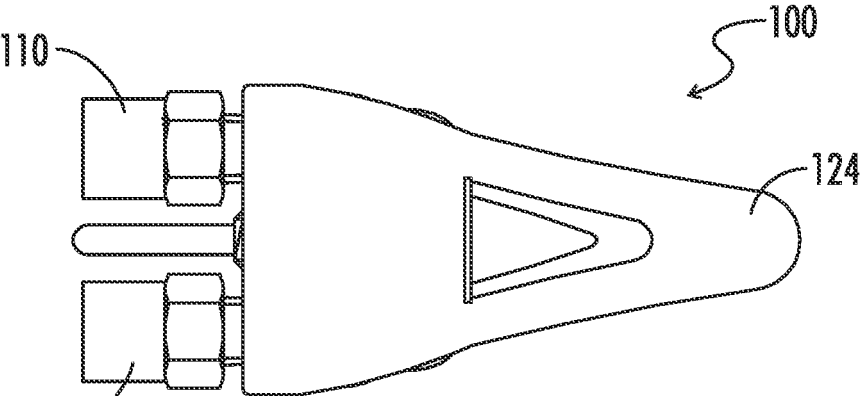


FIG. 2

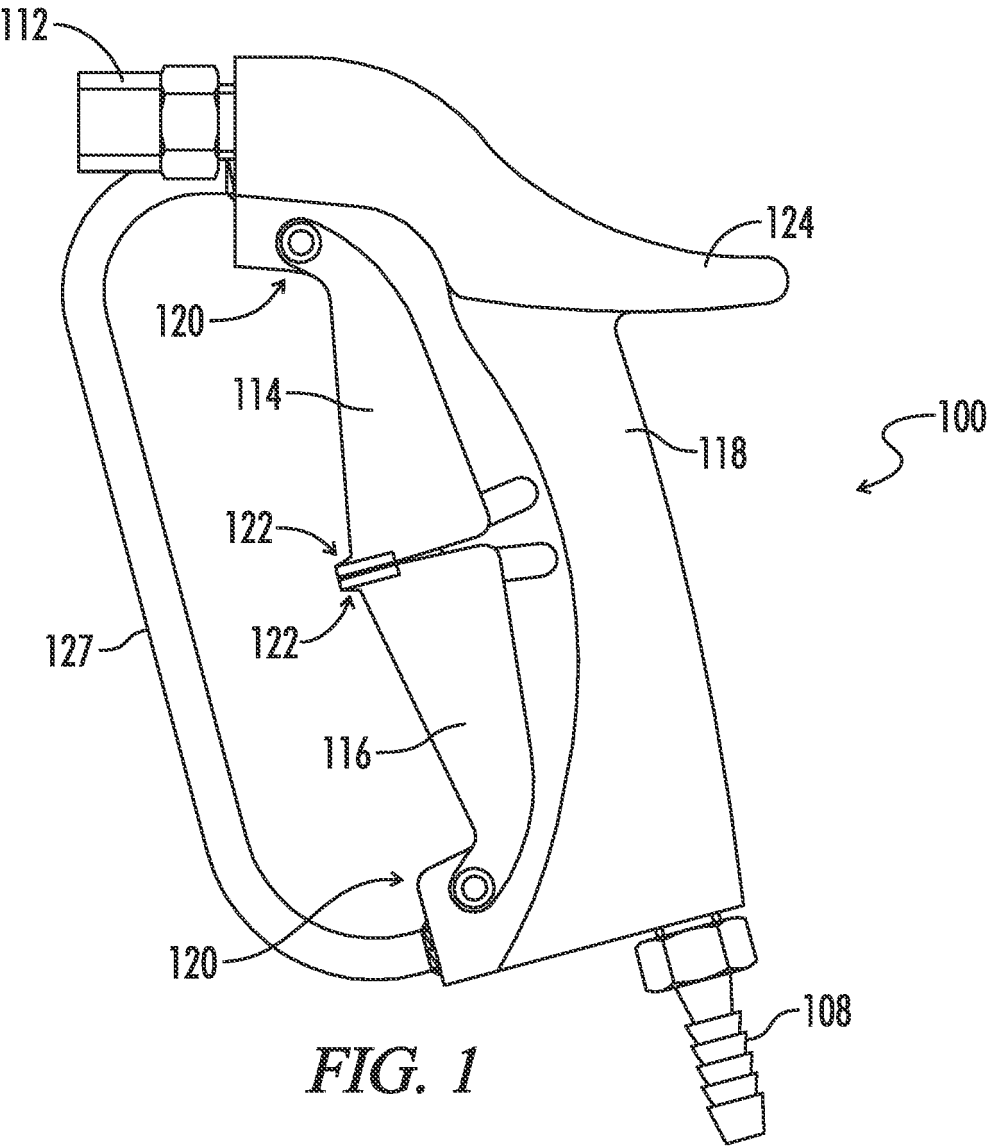


FIG. 1

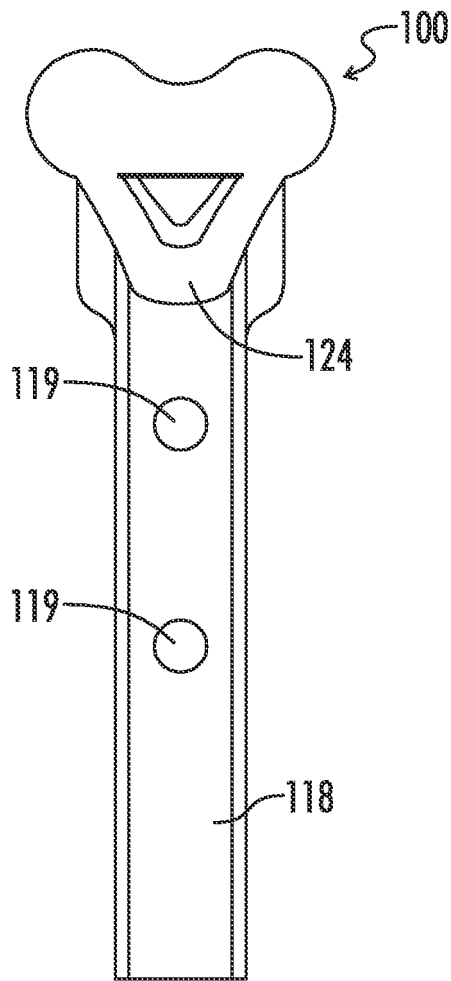


FIG. 3

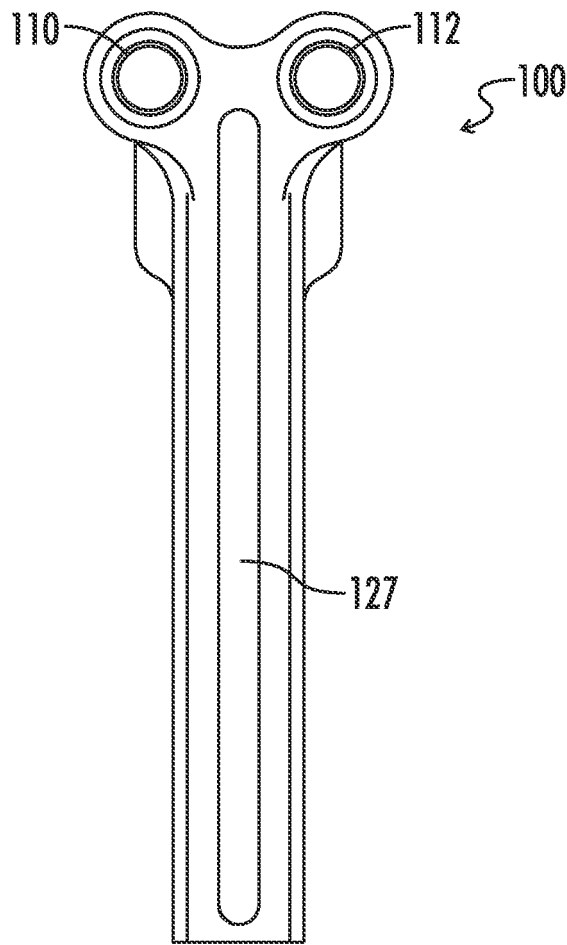


FIG. 4

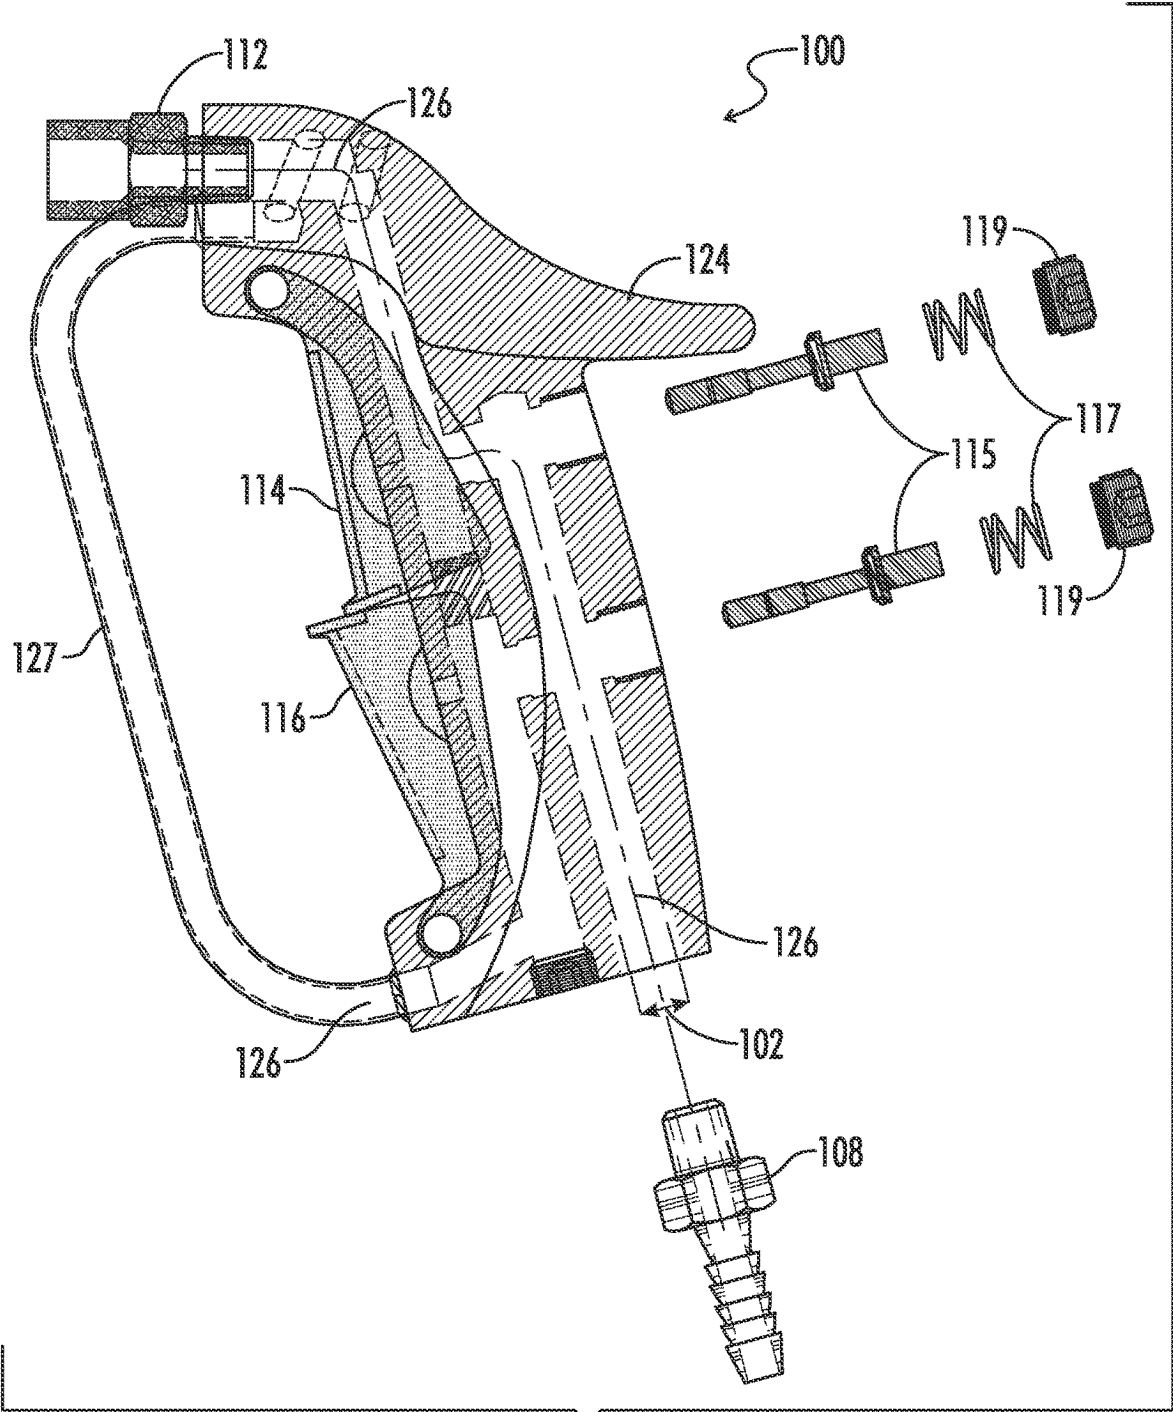
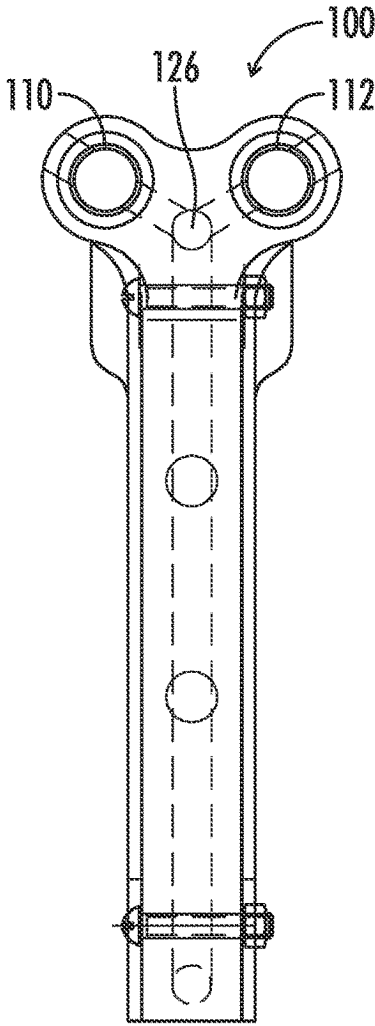
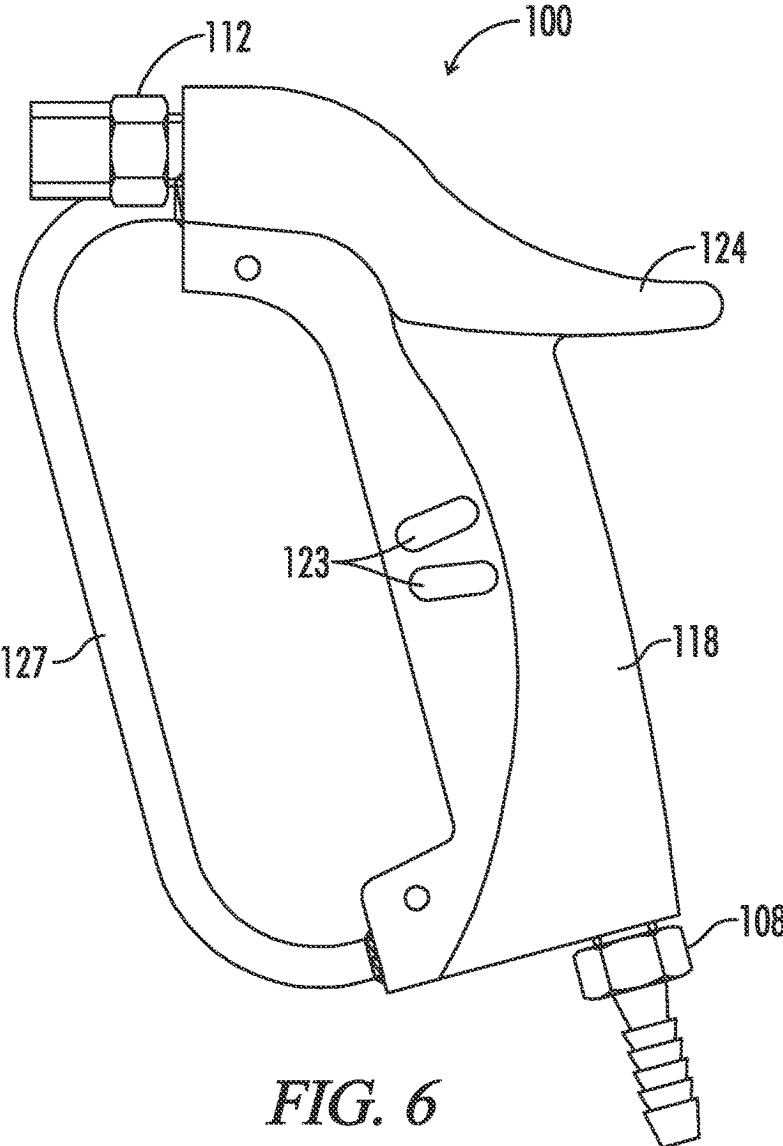


FIG. 5



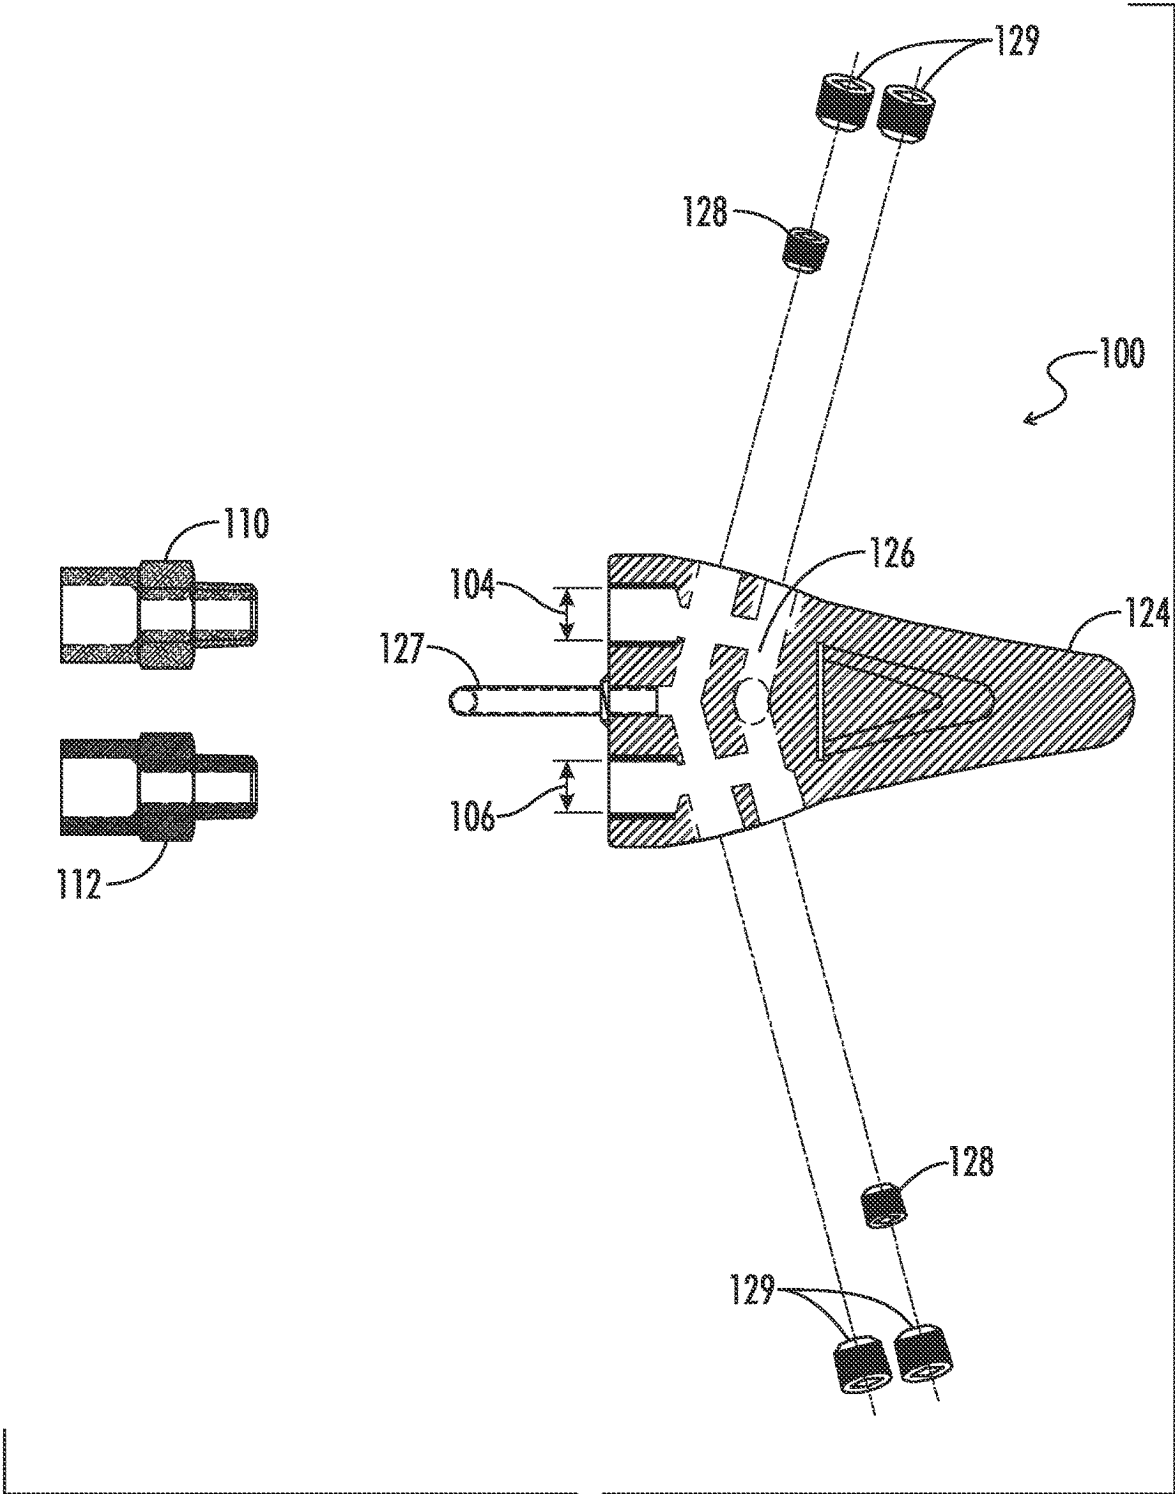


FIG. 8

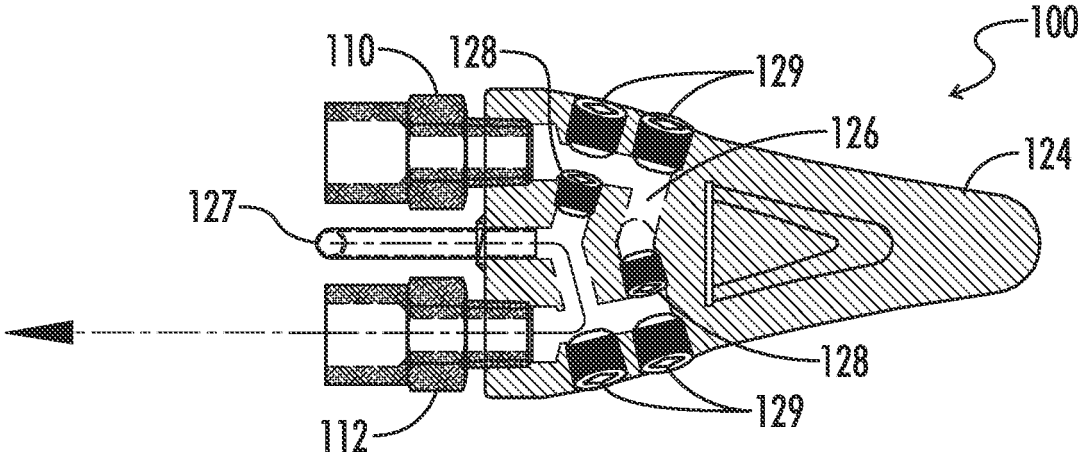


FIG. 9

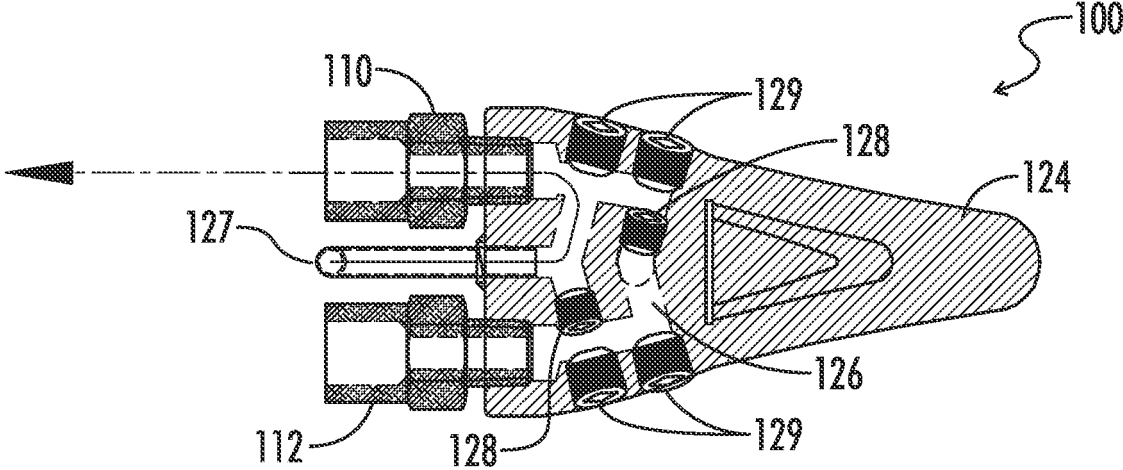


FIG. 10

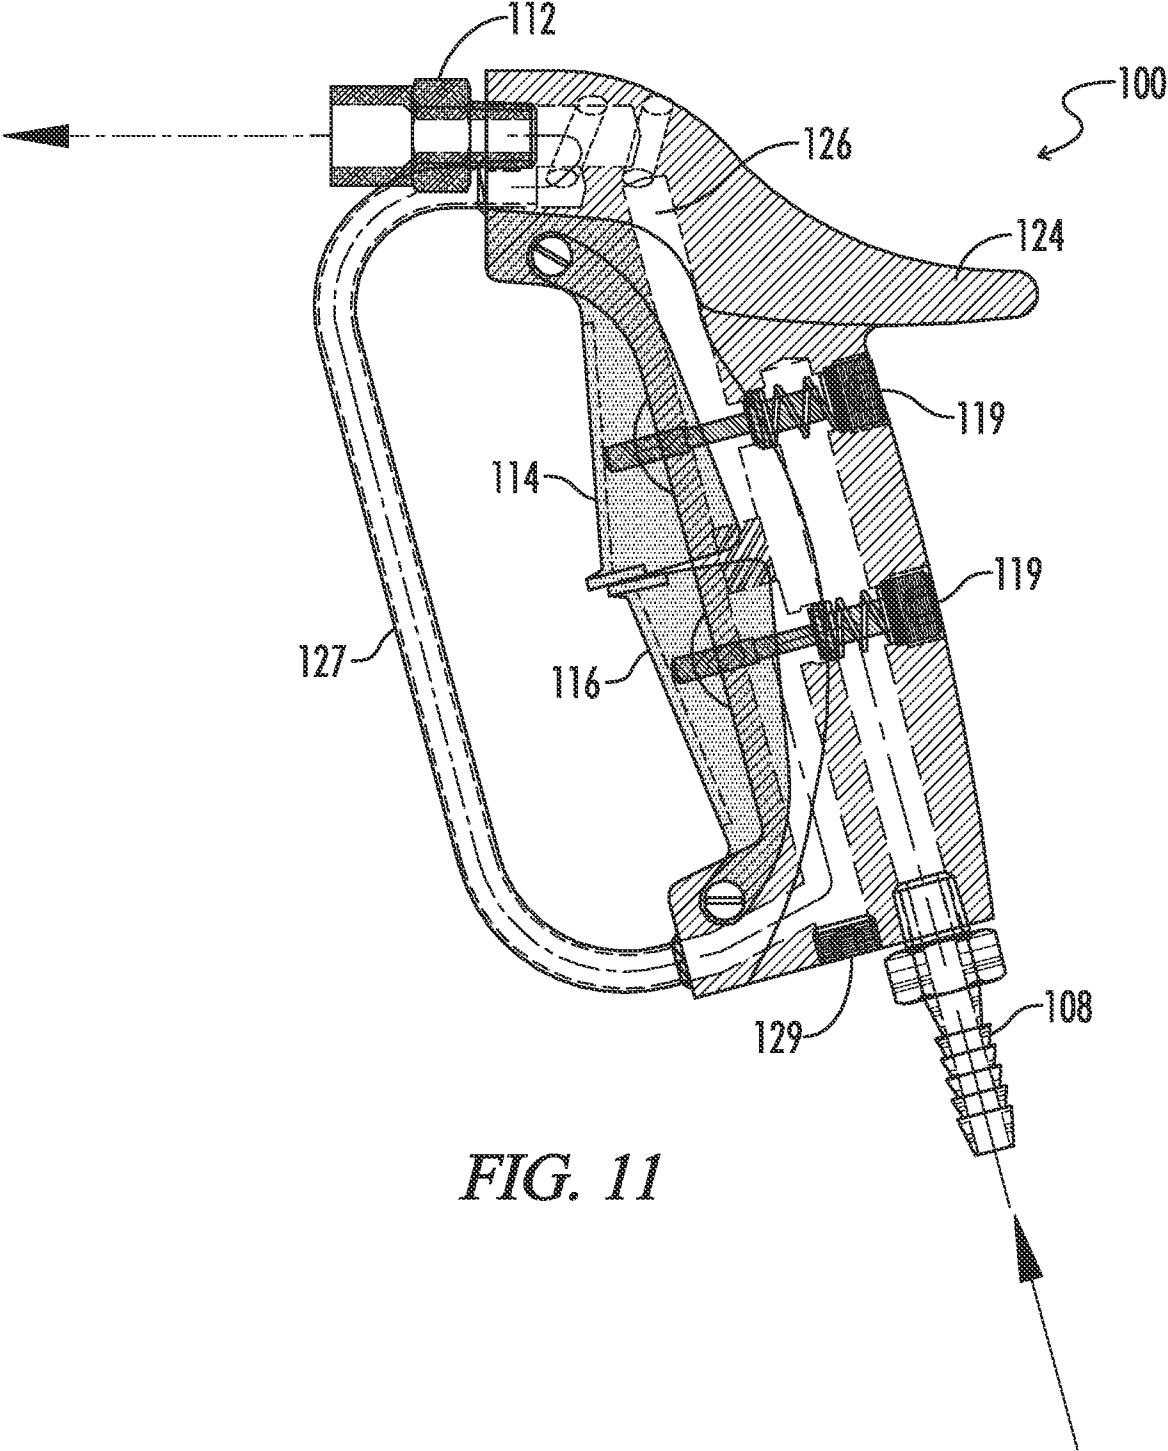


FIG. 11

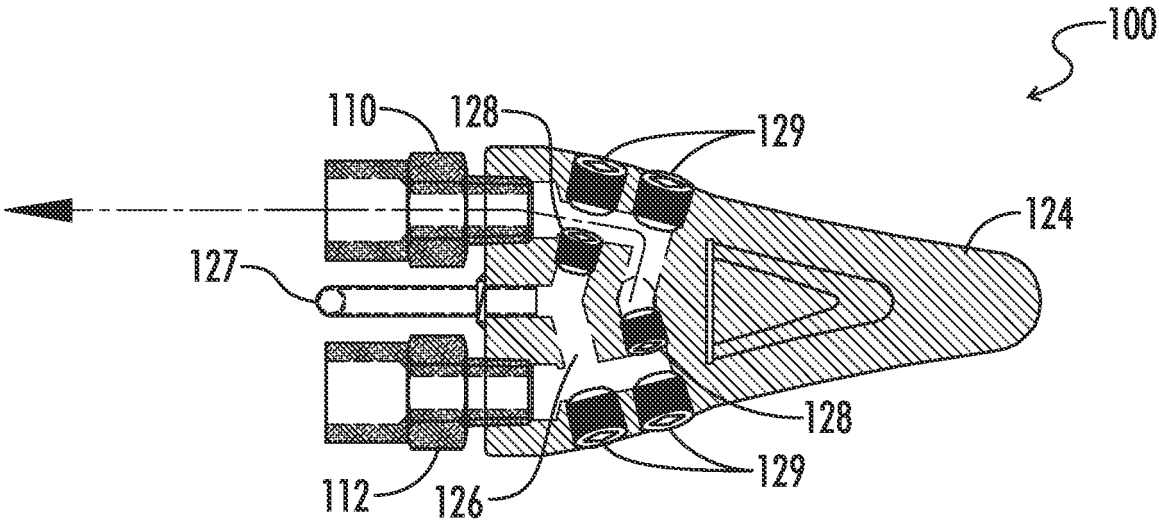


FIG. 12

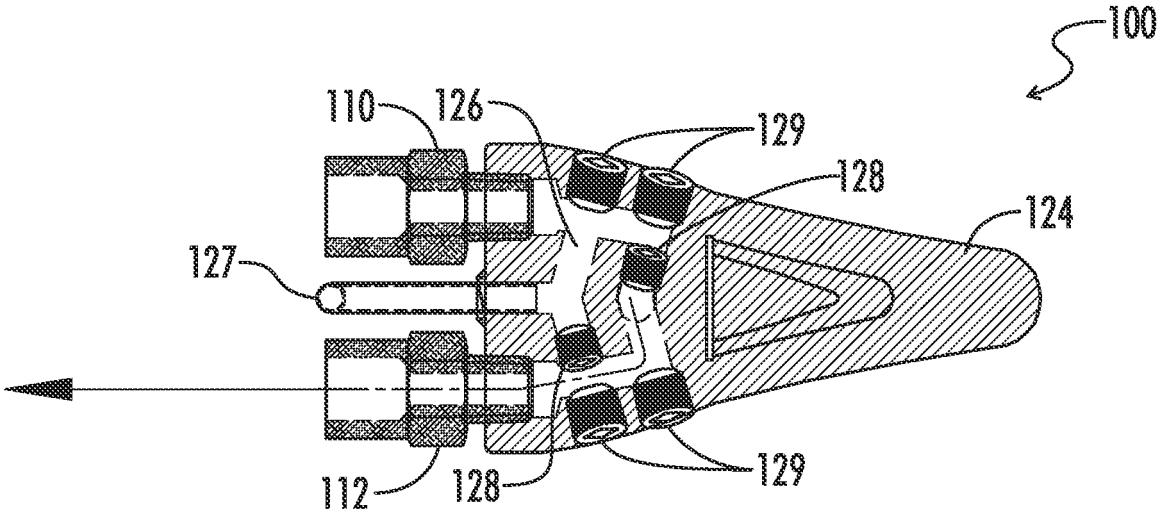


FIG. 13

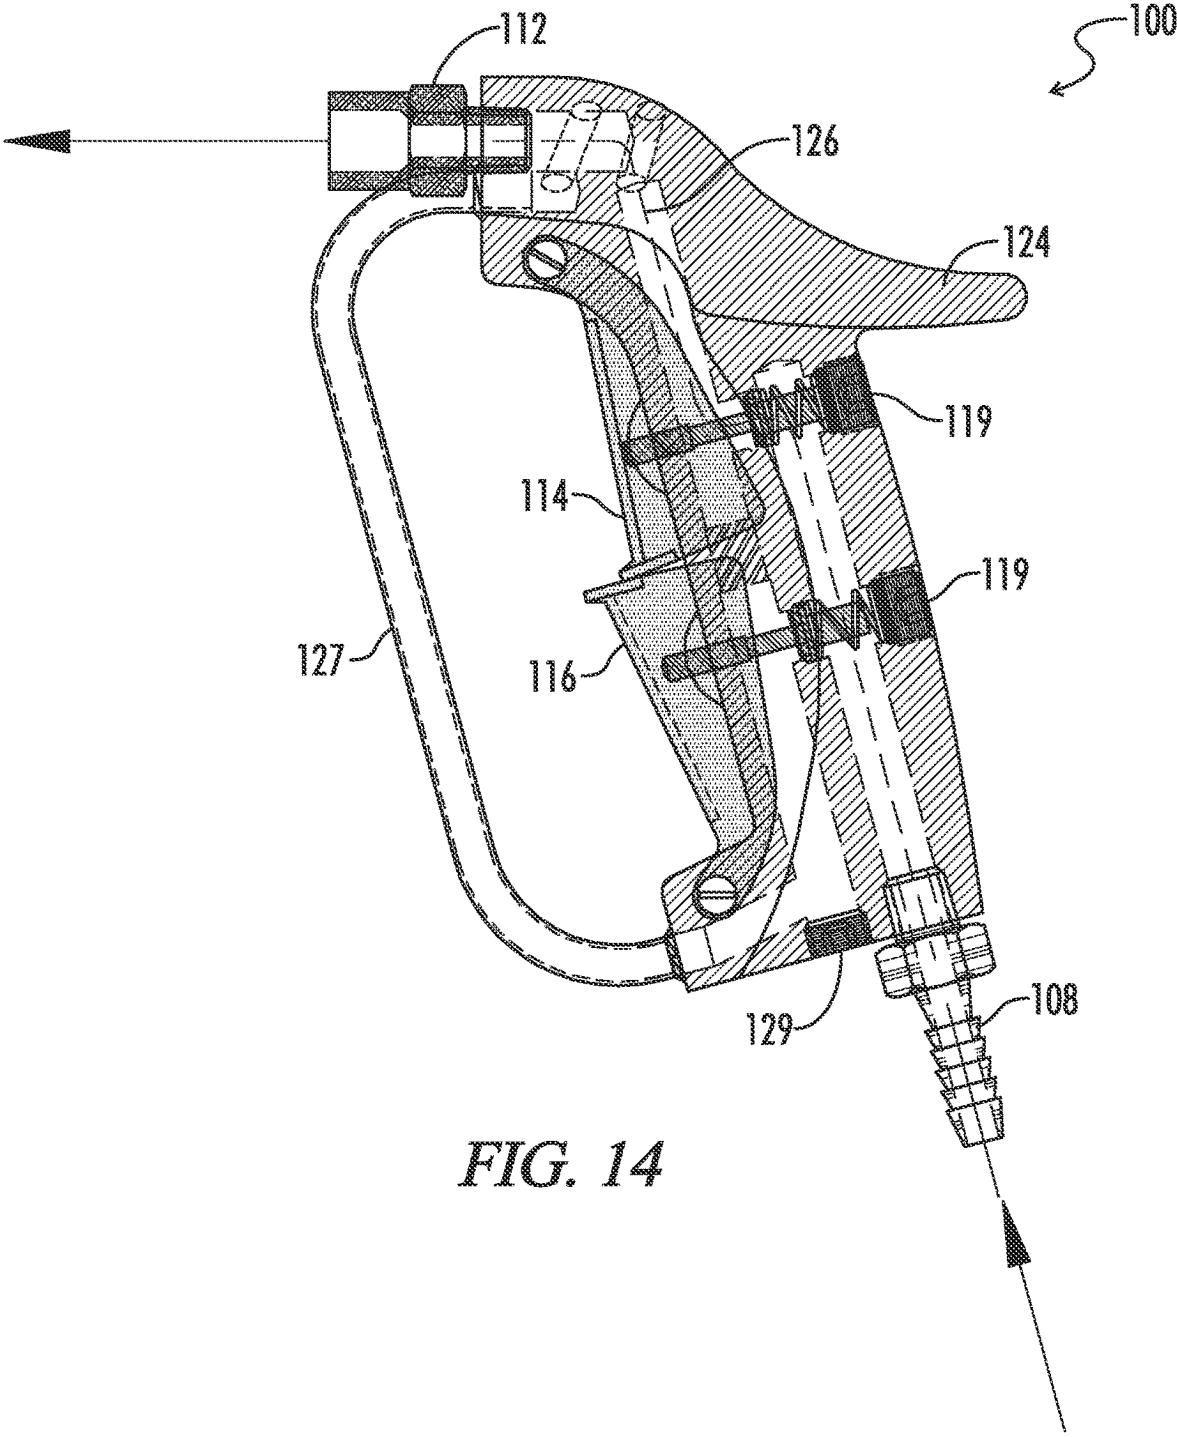


FIG. 14

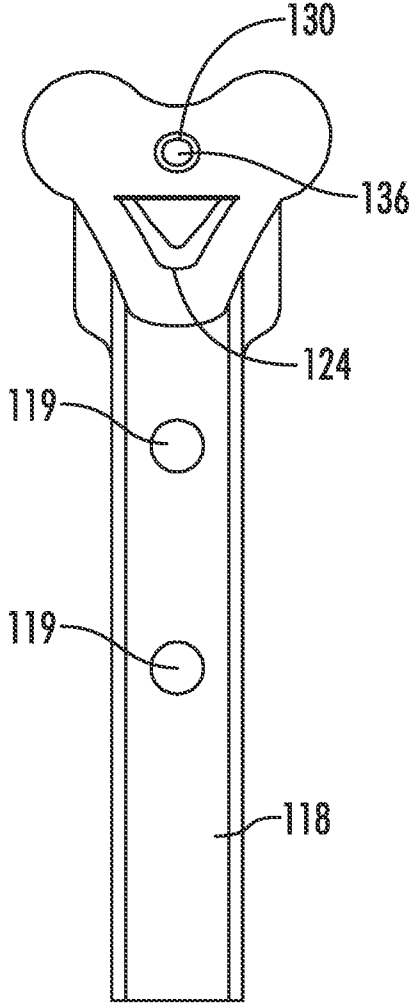


FIG. 15

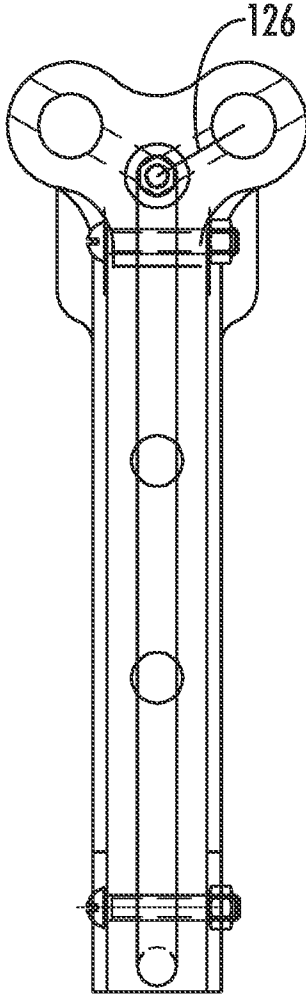


FIG. 16

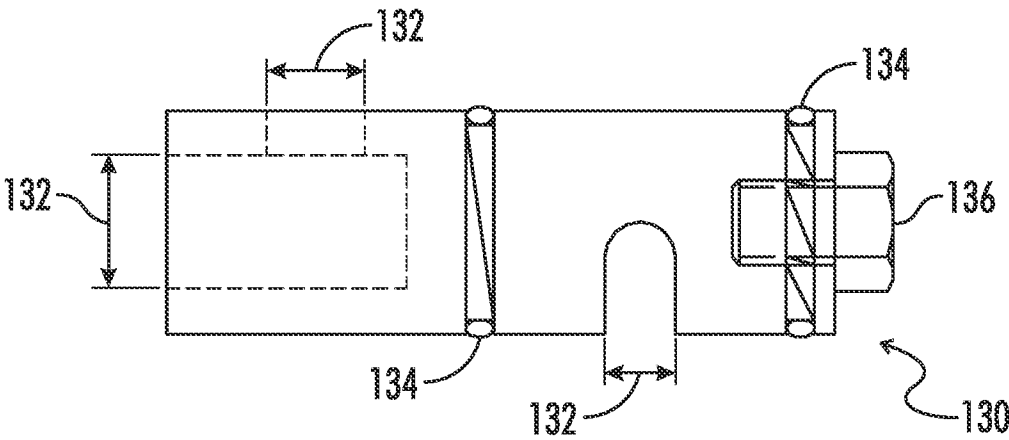


FIG. 17

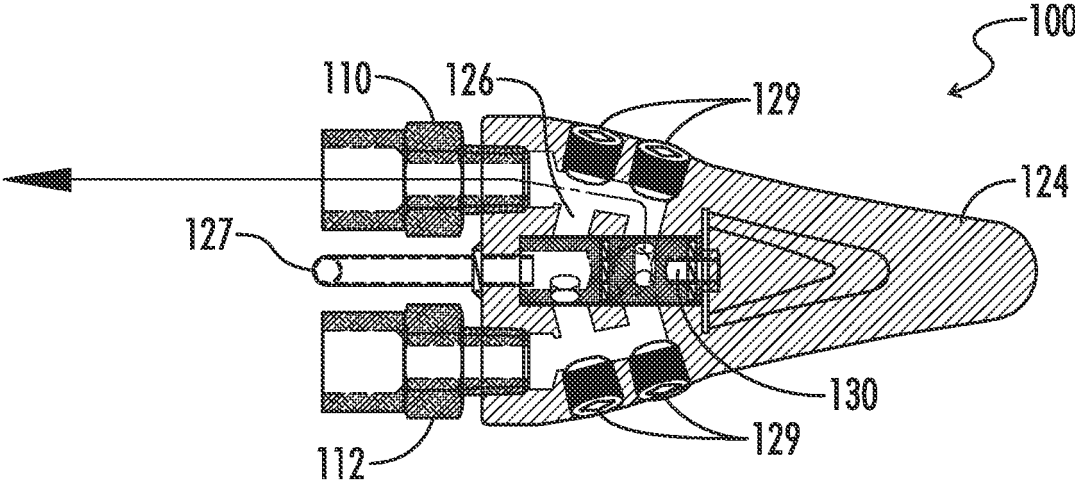


FIG. 18

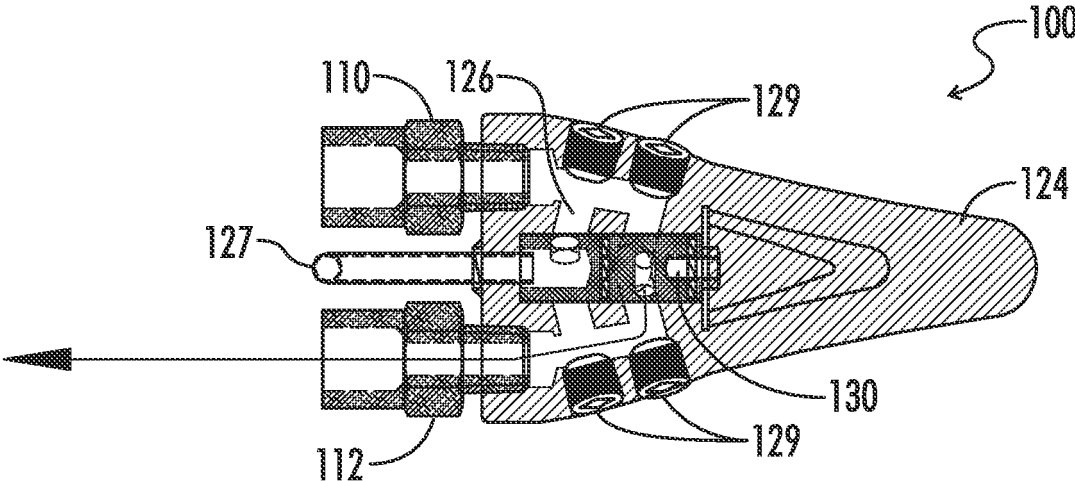


FIG. 19

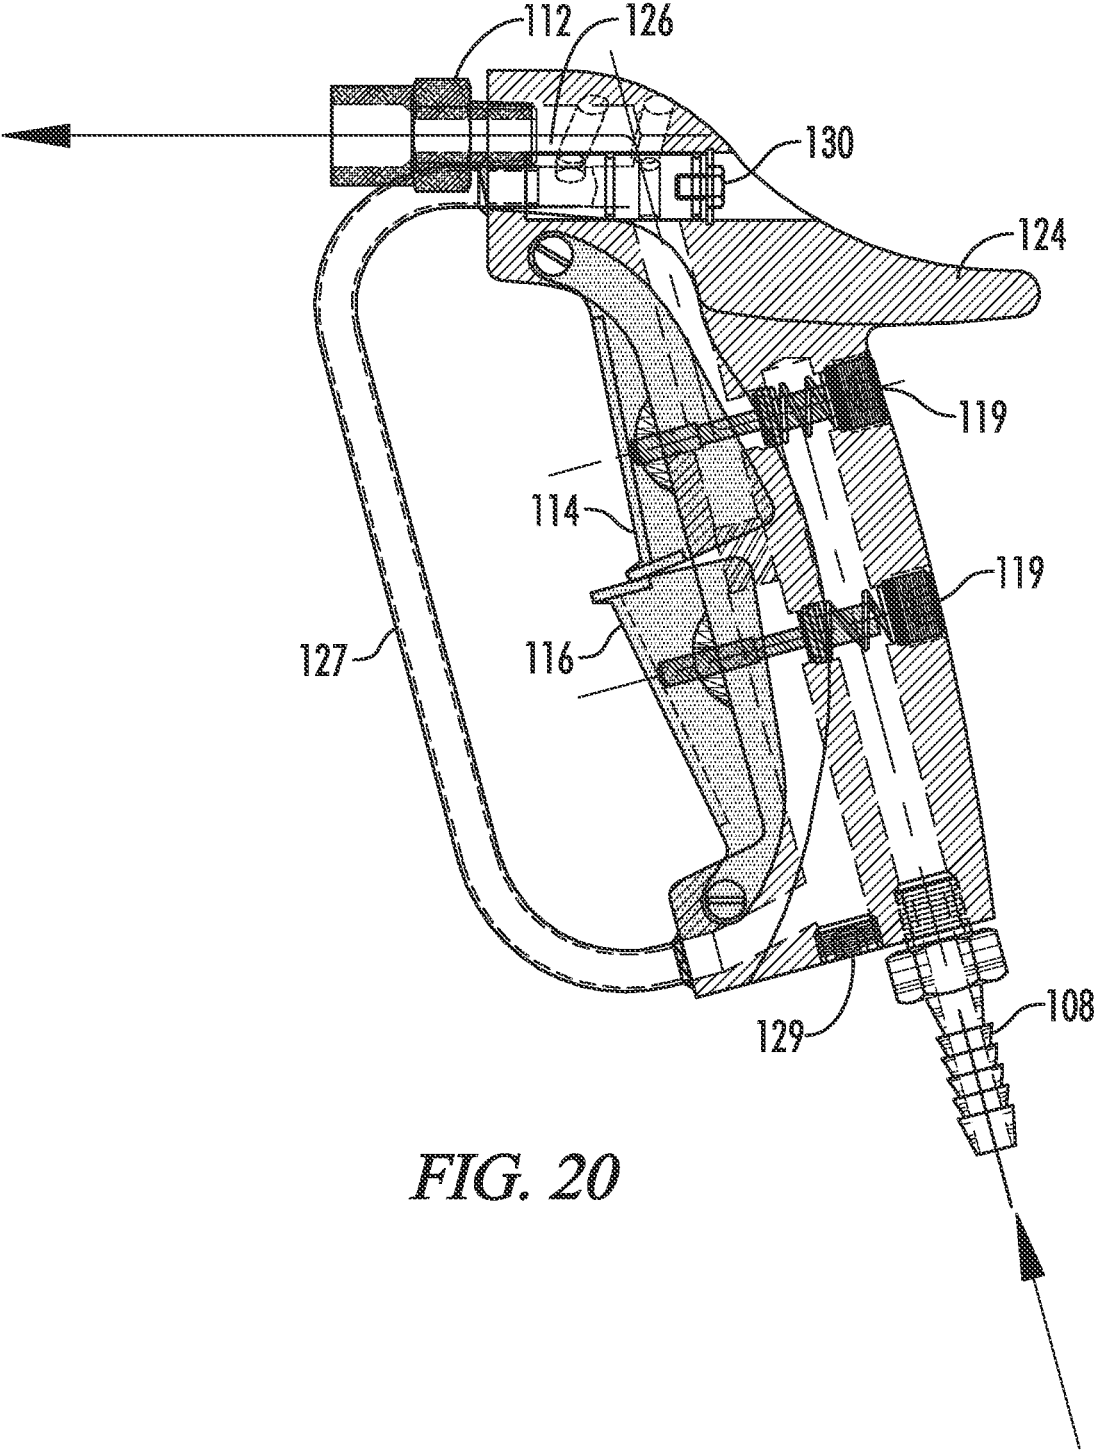


FIG. 20

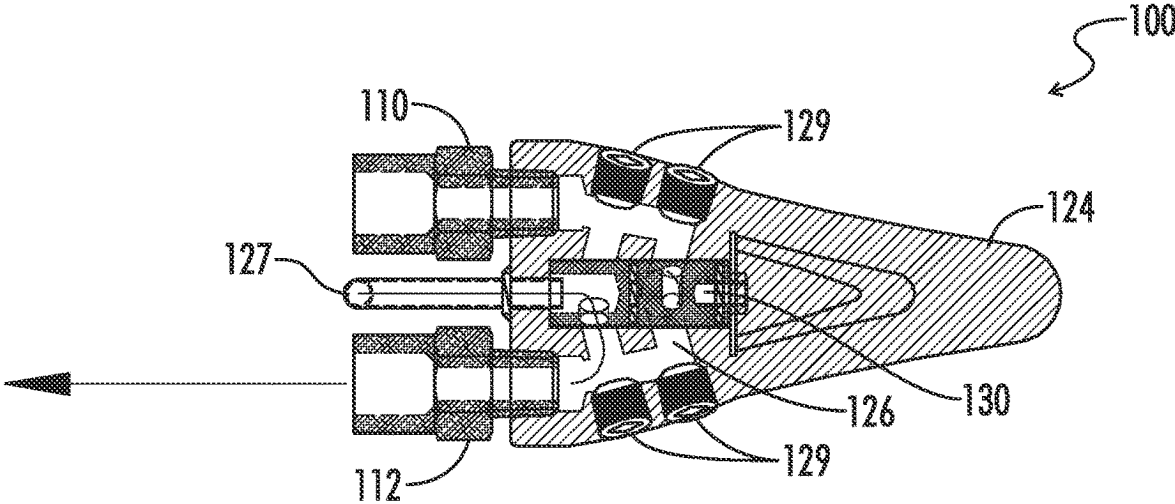


FIG. 21

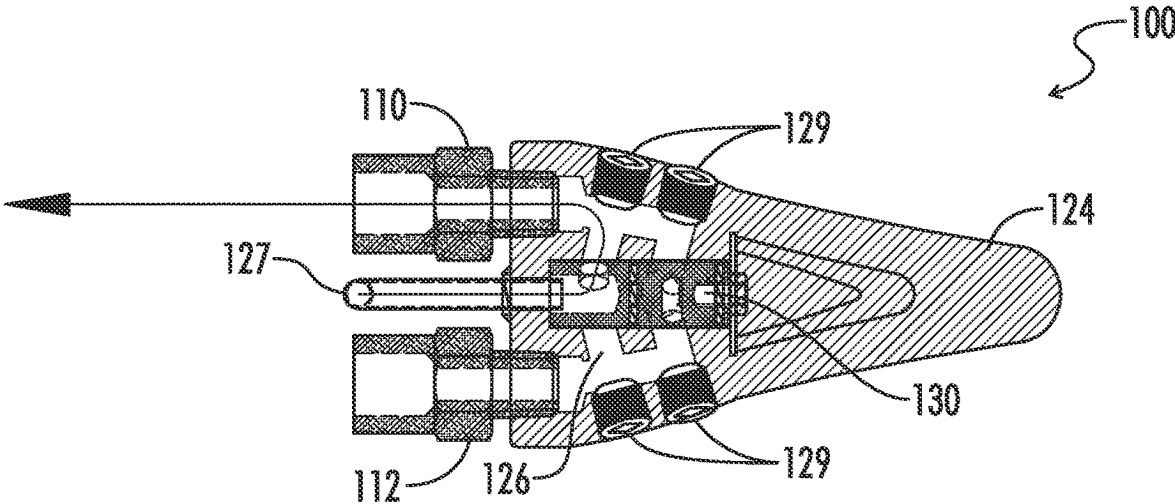


FIG. 22

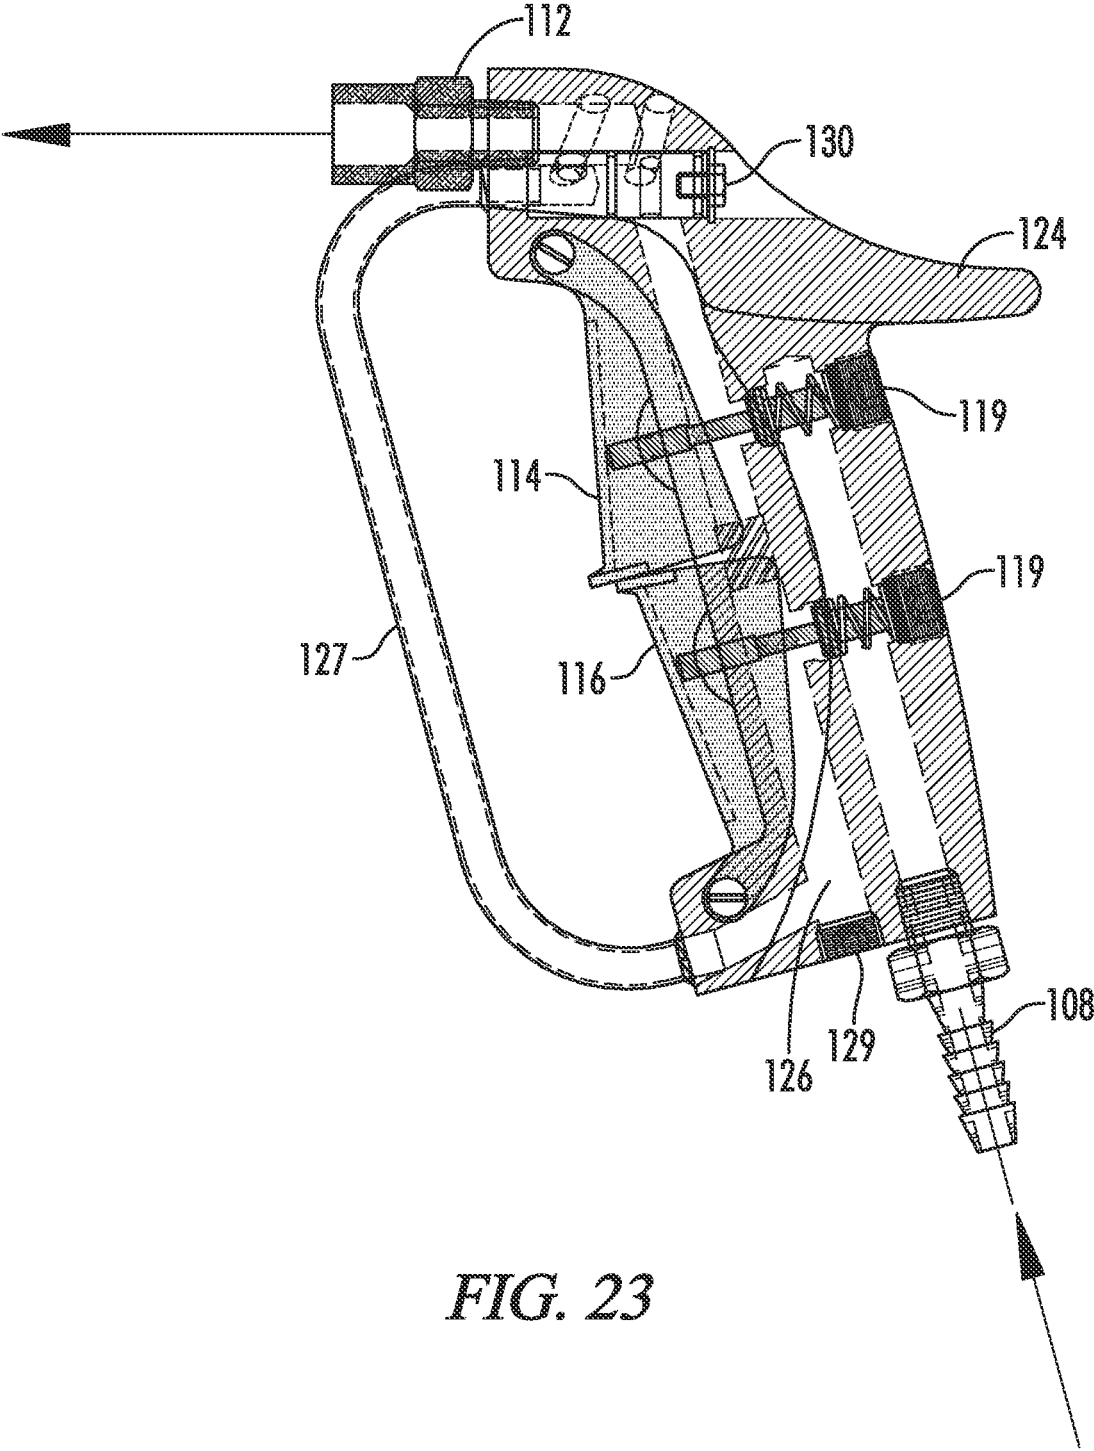


FIG. 23

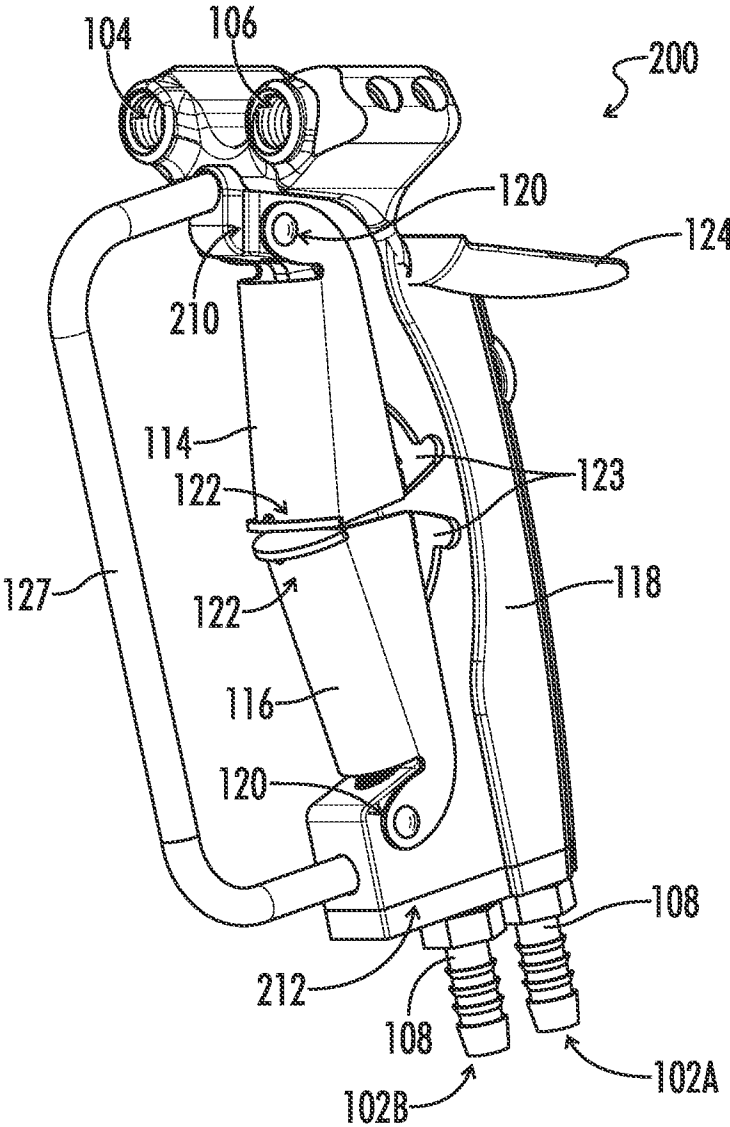


FIG. 24

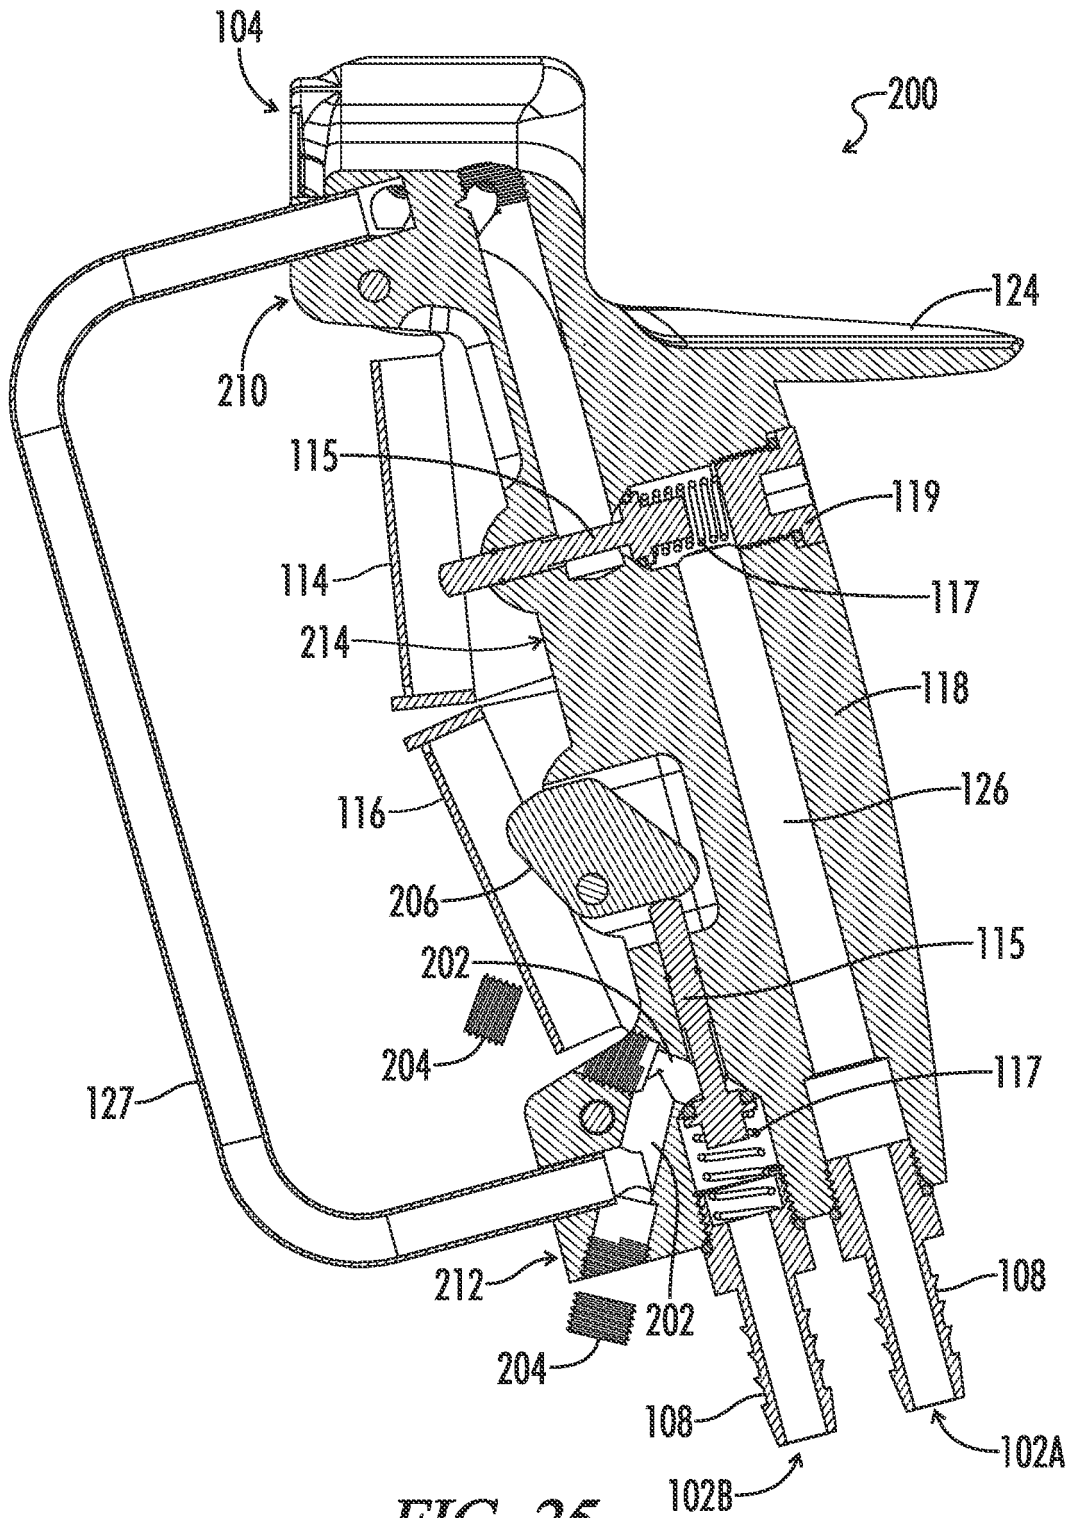


FIG. 25

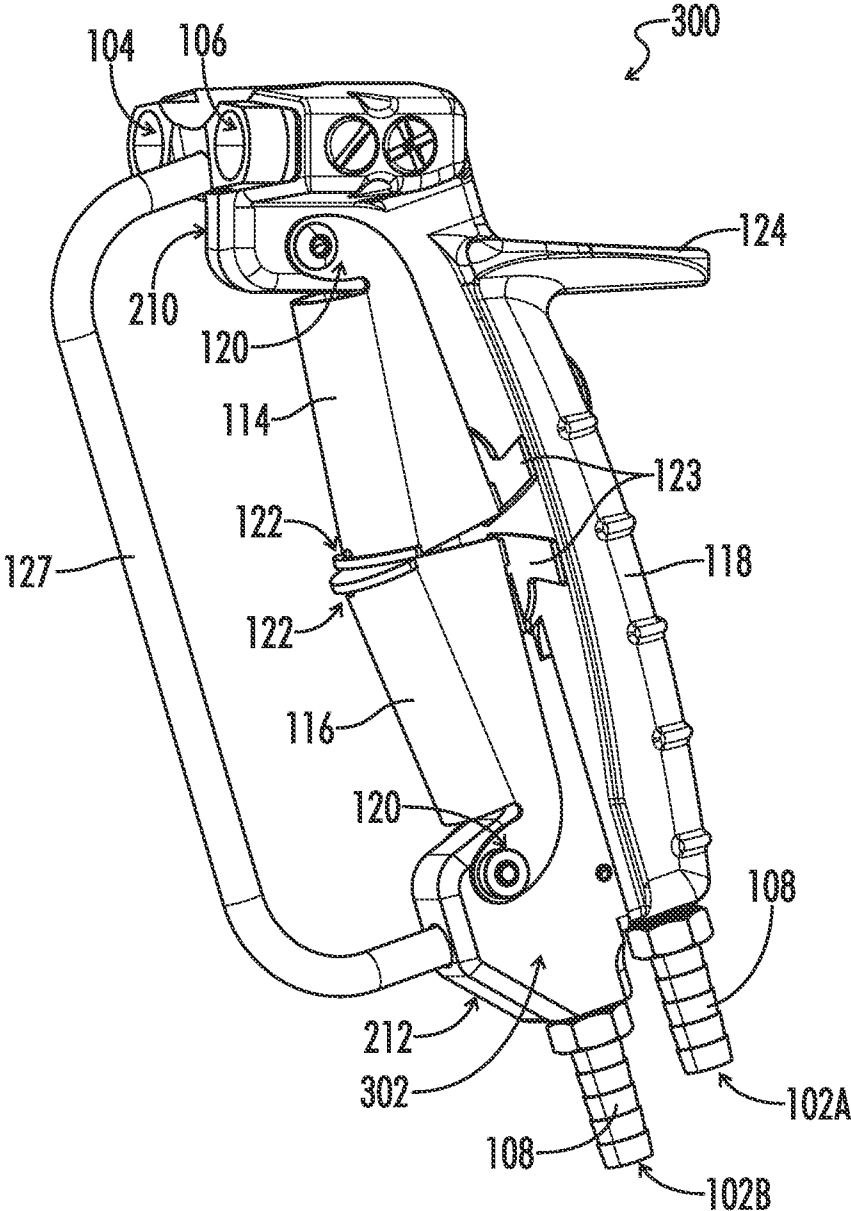


FIG. 26

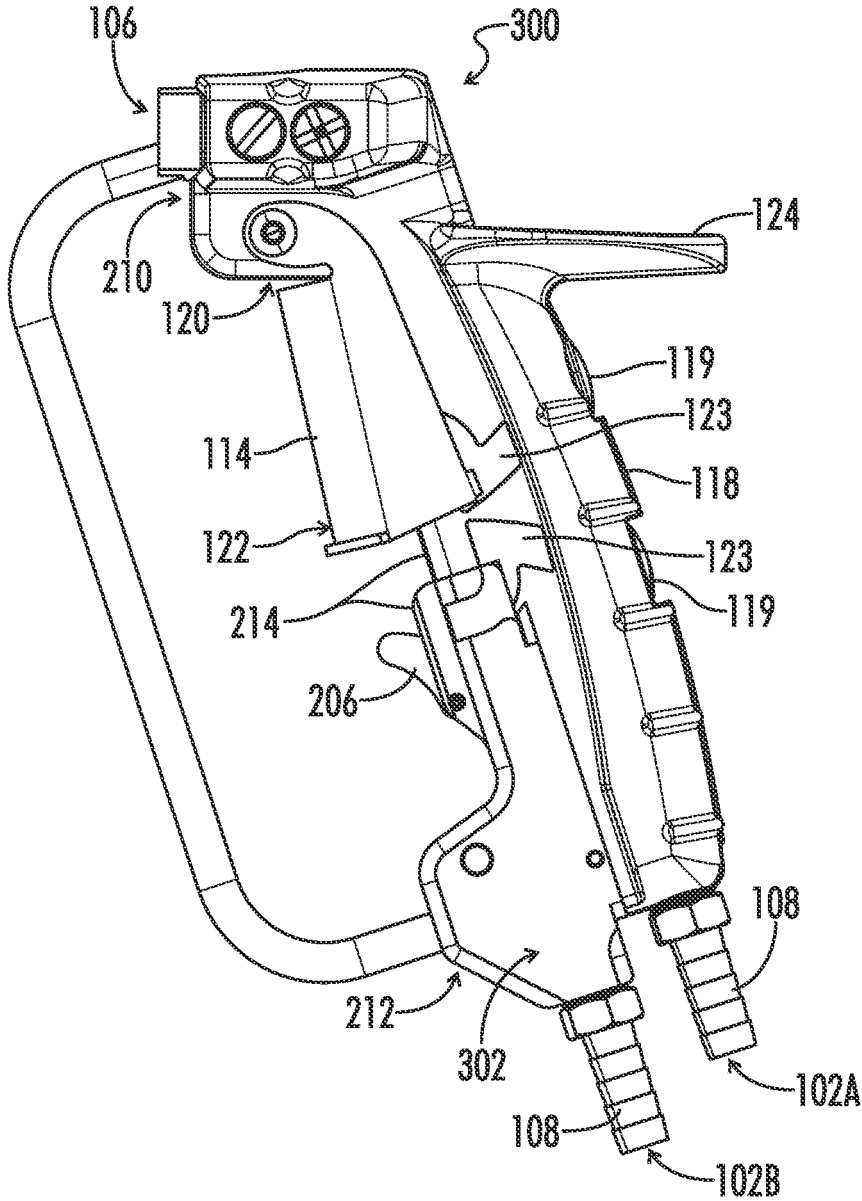


FIG. 27

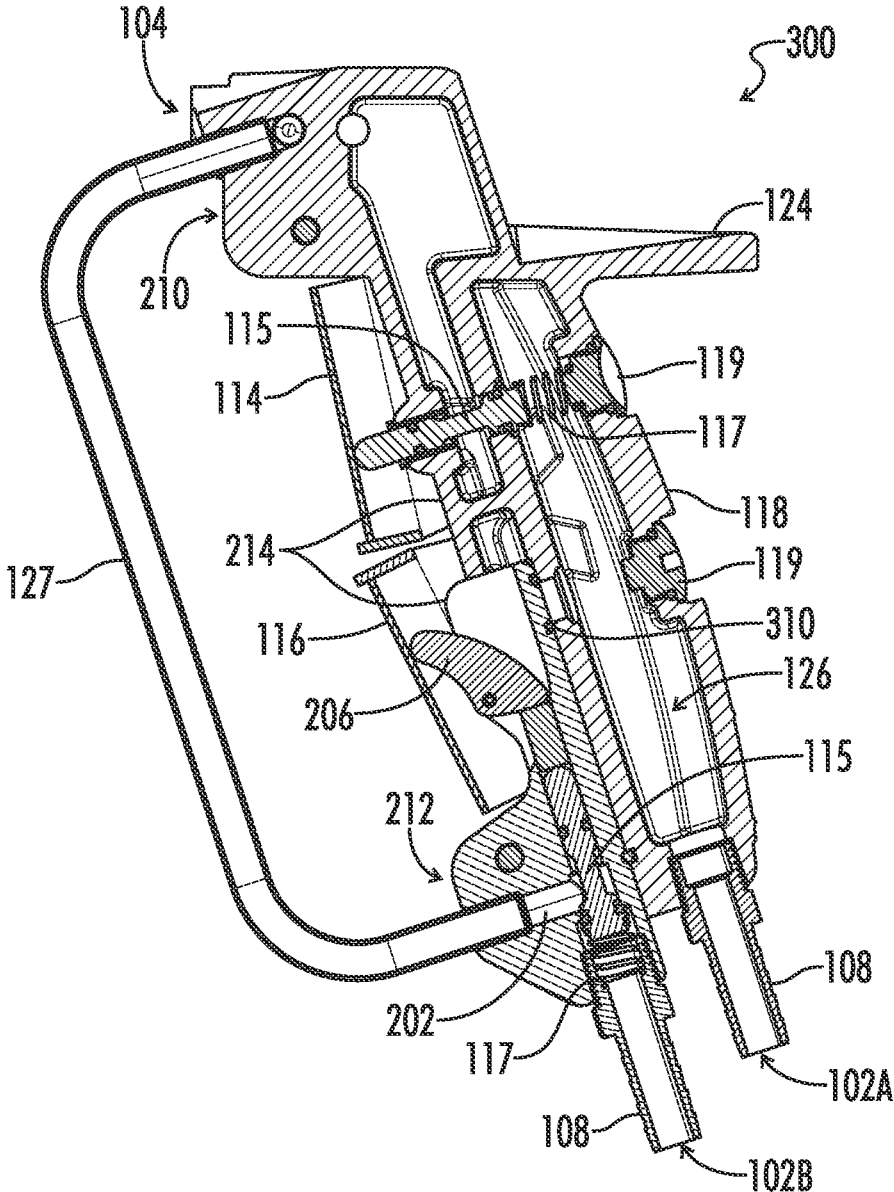


FIG. 28

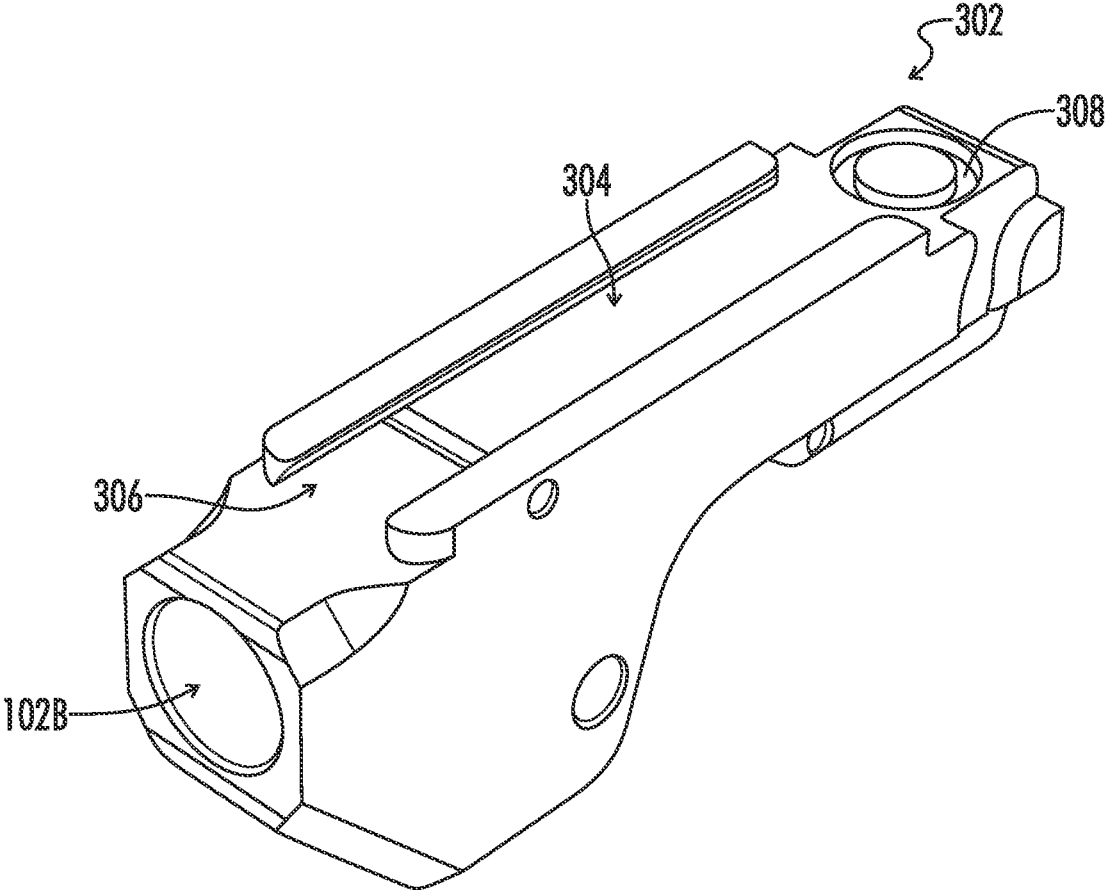


FIG. 29

DUAL NOZZLE SPRAYER**CROSS-REFERENCE TO RELATED APPLICATIONS**

The present application is a continuation-in-part of and claims priority to and benefit from the following patent applications each of which are hereby incorporated by reference in its entirety: U.S. Non-Provisional patent application Ser. No. 15/729,062 filed Oct. 10, 2017, entitled "Dual Nozzle Spray Gun," which is a divisional of U.S. Non-Provisional patent application Ser. No. 15/042,360 filed Feb. 12, 2016, entitled "Dual Nozzle Spray Gun" (now issued as U.S. Pat. No. 9,814,227 on Nov. 13, 2017).

BACKGROUND

The present disclosure relates generally to a fluid spray apparatus. More particularly, the present disclosure pertains to a fluid spray gun including multiple inlets and outlets.

Fluid spray guns are known in the art. In herbicide applications, spray guns with adjustable nozzles designed to be twisted back and forth by a user are available. A user may wish to apply herbicide to a nearby target with a fan-type pattern and to a distant target with a straight stream pattern that will break up into smaller droplets near the target. To adjust the nozzle to either setting, the user must remove his or her hand from the backpack pumping lever to twist the adjustable nozzle. This method also requires the user to make contact with parts covered in the herbicide. Furthermore, the method can become tiresome to a user, prompting the user to leave the nozzle on the straight stream pattern. If left on the straight stream pattern, the spray will over-penetrate the nearby targets and cause poor performance, environmental problems, and wasted herbicide.

BRIEF SUMMARY

Some embodiments of the current disclosure may allow for spraying different patterns using only one hand, transitioning from one pattern to another quickly and easily, and optionally reversing the actuator-output relationship. In certain additional embodiments, the current disclosure may allow for spraying different fluids using only one hand, transitioning from one fluid to another quickly and easily, and optionally reversing the actuator-output relationship. In still further embodiments, each fluid may have a different pattern.

Briefly, the present disclosure relates, in one embodiment, to a fluid spray apparatus. The fluid spray apparatus includes first and second inlets and first and second outlets. The fluid spray apparatus further includes a first actuator. The first actuator is configured to communicate the first inlet with one of the first or second outlets. The fluid spray apparatus also includes a second actuator. The second actuator is also configured to communicate the second inlet with a different one of the first or second outlets.

In certain embodiments, a passage network of the fluid spray apparatus communicates the first and second actuators with the first and second outlets. A diverter structure is disposed in the passage network. The diverter structure includes a first diverter structure arrangement. In the first diverter structure arrangement, the first actuator communicates the first inlet with the first outlet and the second actuator communicates the second inlet with the second outlet. The diverter structure also includes a second diverter structure arrangement. In the second diverter structure arrangement, the first actuator communicates the first inlet with the second outlet and the second actuator communicates the second inlet with the first outlet.

In an alternative embodiment, the diverter structure includes a plurality of plugs removably disposed in one of a plurality of positions blocking a portion of the passage network.

5 In still another embodiment, the diverter structure includes a selector valve.

In yet another embodiment, the first diverter structure arrangement and the second diverter structure arrangement are mutually exclusive.

10 In another embodiment, the first outlet and the second outlet are each configured to receive a variety of fluid spray nozzles.

In a further embodiment, the first outlet includes a diffuse spray nozzle and the second outlet includes a solid stream nozzle.

15 In a further still embodiment, at least one of the first outlet and the second outlet includes an adjustable spray nozzle.

In another embodiment, the second actuator is coupled to the different one of the first or second outlets using an exterior tube positioned forward of the first and second actuators.

20 Yet another embodiment includes a handle, and the first and second actuators are hingedly and opposingly disposed on the handle.

In still another embodiment, the first and second actuators at least partially surround a front side of the handle.

25 In a further embodiment, the first actuator is hingedly coupled to the handle closer to the first and second outlets than to the first and second inlets, and the second actuator is hingedly coupled to the handle closer to the first and second inlets than to the first and second outlets.

30 Yet another embodiment includes a handle, and the first and second actuators are coupled to and at least partially surround an exterior of the handle.

The present disclosure also relates, in one embodiment, to a fluid spray apparatus including at least one inlet, a first outlet, and a second outlet. A first actuator is configured to communicate the at least one inlet with one of the first or second outlets. A second actuator is configured to communicate the at least one inlet with a different one of the first or second outlets.

35 In another embodiment, the at least one inlet includes a first inlet and a second inlet.

In one embodiment, the second actuator is coupled to the different one of the first or second outlets using an exterior tube positioned forward of the first and second actuators.

40 Yet another embodiment includes a handle, and the first and second actuators are coupled to and at least partially surround an exterior front side of the handle.

In a further embodiment, an exterior tube of the fluid spray apparatus is configured to couple the at least one inlet to one of the first or second outlets using the second actuator. The exterior tube may extend from a same side of the handle as the first and second actuators.

45 In a further still embodiment, the first actuator includes a first trigger and the second actuator includes a second trigger. The first and second triggers may be configured to be aligned with each other and opposed to each other.

In an even further embodiment, each of the first and second actuators is further configured to prevent communication between the at least one inlet and the first and second outlets when the actuators are unactuated.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a side view of one embodiment of the fluid spray apparatus.

FIG. 2 is a top view of the fluid spray apparatus of FIG. 1.

3

FIG. 3 is a rear view of the fluid spray apparatus of FIG. 1.

FIG. 4 is a front view of the fluid spray apparatus of FIG. 1 with the actuators removed.

FIG. 5 is a side cross-sectional partially exploded view of the fluid spray apparatus of FIG. 1.

FIG. 6 is a side view of the fluid spray apparatus of FIG. 1 with the actuators removed.

FIG. 7 is a front cross-sectional view of the fluid spray apparatus of FIG. 1.

FIG. 8 is a top cross-sectional partially exploded view of the fluid spray apparatus of FIG. 1.

FIG. 9 is a top cross-sectional view of the fluid spray apparatus of FIG. 1 with the diverter structure in a first arrangement and the bottom actuator actuated.

FIG. 10 is a top cross-sectional view of the fluid spray apparatus of FIG. 1 with the diverter structure in a second arrangement and the bottom actuator actuated.

FIG. 11 is a side cross-sectional view of the fluid spray apparatus of FIG. 1 with the bottom actuator actuated.

FIG. 12 is a top cross-sectional view of the fluid spray apparatus of FIG. 1 with the diverter structure in a first arrangement and the top actuator actuated.

FIG. 13 is a top cross-sectional view of the fluid spray apparatus of FIG. 1 with the diverter structure in a second arrangement and the top actuator actuated.

FIG. 14 is a side cross-sectional view of the fluid spray apparatus of FIG. 1 with the top actuator actuated.

FIG. 15 is a rear view of one embodiment of the fluid spray apparatus.

FIG. 16 is a front cross-sectional view of the fluid spray apparatus of FIG. 15.

FIG. 17 is a side view of a selector valve of the fluid spray apparatus of FIG. 15.

FIG. 18 is a top cross-sectional view of the fluid spray apparatus of FIG. 15 with the diverter structure in a first arrangement and the top actuator actuated.

FIG. 19 is a top cross-sectional view of the fluid spray apparatus of FIG. 15 with the diverter structure in a second arrangement and the top actuator actuated.

FIG. 20 is a side cross-sectional view of the fluid spray apparatus of FIG. 15 with the top actuator actuated.

FIG. 21 is a top cross-sectional view of the fluid spray apparatus of FIG. 15 with the diverter structure in a first arrangement and the bottom actuator actuated.

FIG. 22 is a top cross-sectional view of the fluid spray apparatus of FIG. 15 with the diverter structure in a second arrangement and the bottom actuator actuated.

FIG. 23 is a side cross-sectional view of the fluid spray apparatus of FIG. 15 with the bottom actuator actuated.

FIG. 24 is a perspective view of another embodiment of the fluid spray apparatus.

FIG. 25 is a side cross-sectional of the fluid spray apparatus of FIG. 24.

FIG. 26 is a perspective view of yet another embodiment of the fluid spray apparatus.

FIG. 27 is a side view of the fluid spray apparatus of FIG. 26 with the second actuator removed.

FIG. 28 is a side cross-sectional of the fluid spray apparatus of FIG. 26.

FIG. 29 is a rear perspective view of the retrofit portion of the fluid spray apparatus of FIG. 26.

DETAILED DESCRIPTION

Reference will now be made in detail to embodiments of the present disclosure, one or more drawings of which are

4

set forth herein. Each drawing is provided by way of explanation of the present disclosure and is not a limitation. In fact, it will be apparent to those skilled in the art that various modifications and variations can be made to the teachings of the present disclosure without departing from the scope of the disclosure. For instance, features illustrated or described as part of one embodiment can be used with another embodiment to yield a still further embodiment.

Thus, it is intended that the present disclosure covers such modifications and variations as come within the scope of the appended claims and their equivalents. Other objects, features, and aspects of the present disclosure are disclosed in, or are obvious from, the following detailed description. It is to be understood by one of ordinary skill in the art that the present discussion is a description of exemplary embodiments only and is not intended as limiting the broader aspects of the present disclosure.

The words “connected” and “attached” should be interpreted to mean any manner of joining two objects including, but not limited to, the use of any fasteners such as screws, nuts and bolts, bolts, pin and clevis, and the like allowing for a stationary, translatable, or pivotable relationship; welding of any kind such as traditional MIG welding, TIG welding, friction welding, brazing, soldering, ultrasonic welding, torch welding, inductive welding, and the like; using any resin, glue, epoxy, and the like; being integrally formed as a single part together; any mechanical fit such as a friction fit, interference fit, slidable fit, rotatable fit, pivotable fit, and the like; any combination thereof; and the like.

Unless specifically stated otherwise, any part of the apparatus of the present disclosure may be made of any appropriate or suitable material including, but not limited to, metal, alloy, polymer, polymer mixture, wood, composite, or any combination thereof.

Referring to the Figures, one embodiment of a fluid spray apparatus, or spray gun, **100** is shown. As can best be seen in FIG. 5, the spray gun **100** includes an inlet **102**, a first outlet **104**, and a second outlet **106**. The spray gun **100** optionally includes a hose attachment barb **108** on the inlet **102**. The inlet **102** could alternatively include a quick-release connector, a threaded male or female coupler, and the like. The spray gun **100** may also include a first nozzle **110** disposed on the first outlet **104** and a second nozzle **112** disposed on the second outlet **106**. Both first nozzle **110** and second nozzle **112** may be permanently connected or removably connected to the spray gun **100**. The first and second nozzles **110**, **112** may include commonly available standard spray tips that are threadedly received in the first and second outlets **104**, **106** respectively. In other embodiments, the nozzles **110**, **112** are retained in the outlets **104**, **106** with quick-release, snap-on, latching, or other releasable attachment configurations. First nozzle **110** and second nozzle **112** may be of varying spray patterns such that the spray gun **100** may operate with any of a plurality of spray patterns. One embodiment of the spray gun **100** includes the first outlet **104** including a diffuse spray nozzle and the second outlet **106** including a solid stream nozzle. Another embodiment of the spray gun **100** includes at least one of the first outlet **104** and second outlet **106** including an adjustable spray nozzle.

In an embodiment, a first actuator **114** is configured to communicate the inlet **102** with at least one of the outlets **104**, **106** such that communication is prevented when the first actuator is unactuated. A second actuator **116** is also configured to communicate the inlet **102** with at least one of the outlets **104**, **106** such that communication is prevented when the second actuator is unactuated. Each actuator **114**, **116** may actuate valves **115** that are normally biased toward

5

the closed position by springs **117**. Each valve **115** may be accessible for replacement or repair by removing a spring retainer plug **119** with common tools, including, but not limited to, a hex key. The actuators **114**, **116** may be hingedly connected to the handle **118** such that the actuators include triggers. In some embodiments, the handle **118** may be a pistol grip handle. The actuators **114**, **116** may be aligned with each other and opposingly disposed on the handle **118**. The actuators **114**, **116** may be configured such that the first actuator **114** may be actuated with the index finger and middle finger of a user and the second actuator **116** may be actuated with the ring finger and little finger of the user. Each actuator **114**, **116** may include a hinge end **120** and a free end **122**. The free ends **122** of the actuators **114**, **116** may be nearer each other than the hinge ends **120**.

The handle **118** of the spray apparatus may, in some embodiments, include guide channels **123** configured to receive a portion of a respective trigger/actuator **114**, **116**. The guide channels **123**, in conjunction with the curved free ends **122** of the triggers **114**, **116**, may prevent pinching a user's fingers when one or more of the triggers are actuated. In at least one embodiment, the trigger free ends **122** remain in contact with each other during actuation. The channels **123** also may function to prevent over-actuation of the actuators **114**, **116**. The channels **123** may further function to hold the actuators in close readiness to the valve assembly.

In some embodiments, the handle **118** is angled from the spray direction of the nozzles **110**, **112** such that the handle and the spray direction of the nozzles forms an angle of between 90 and 180 degrees. More specifically, the handle **118** and the spray direction of the nozzles **110**, **112** form an angle of between 90 and 120 degrees. Even more specifically, the handle **118** and the spray direction of the nozzles **110**, **112** form an angle of 105 degrees. These angles may be desirable to allow for ergonomic and comfortable use for a user's wrist when holding the spray apparatus **100**. Furthermore, the spray apparatus **100** may include a flat or contoured protrusion **124** extending from the handle. The protrusion **124** may be configured such that a user's hand between the thumb and index finger may rest against the protrusion to aid in supporting the weight of the spray apparatus **100**. Another ergonomic feature optionally included in the spray apparatus **100** is the location of the inlet **102** at the bottom of the handle **118**. This location allows for any hose attached to the hose attachment barb **108** to extend below the wrist of a user so the hose does not get in the way of the user's arm and so the weight of the hose and the spray gun **100** may be close to the user's hand.

Some embodiments of the fluid spray apparatus **100** may include a passage network **126** including multiple paths connecting the inlet **102** with the first outlet **104** and second outlet **106**. The paths may be, but are not limited to, one or more paths defined in the handle **118** of the spray apparatus **100**, one or more tubes **127** exterior to the handle of the spray apparatus, and the like.

In one embodiment of the fluid spray apparatus **100**, a diverter structure including a plurality of plugs **128** may be removably disposed in one of a plurality of positions blocking a portion of the passage network **126**. Threaded covers **129** may be removed with common tools including, but not limited to, a hex key to access the plugs **128** or to clean the passage network **126**. The plurality of positions may form a first diverter structure arrangement and a second diverter structure arrangement. In some embodiments, the first diverter structure arrangement and the second diverter structure arrangement may be mutually exclusive.

6

As shown in FIGS. **9** and **12**, the plurality of plugs **128** may be placed in a first diverter structure arrangement wherein the first actuator **114** may communicate the inlet **102** with the first outlet **104** and the second actuator **116** may communicate the inlet with the second outlet **106**. In embodiments including the hose attachment barb **108** and the first and second nozzles **110**, **112**, the first actuator **114** may communicate the opening of the hose attachment barb with the opening of the first nozzle and the second actuator **116** may communicate the opening of the hose attachment barb with the opening of the second nozzle.

As shown in FIGS. **10** and **13**, the plurality of plugs **128** may be placed in a second diverter structure arrangement wherein the first actuator **114** may communicate the inlet **102** with the second outlet **106** and the second actuator **116** may communicate the inlet with the first outlet **104**. In some embodiments, the first actuator **114** may communicate the opening of the hose attachment barb **108** with the opening of the second nozzle **112** and the second actuator **116** may communicate the opening of the hose attachment barb with the opening of the first nozzle **110**.

In some embodiments of the fluid spray apparatus **100**, the diverter structure may include a selector valve **130**. As can best be seen in FIG. **17**, the selector valve **130** may include a plurality of pathways **132** to direct fluid flow. The selector valve **130** may also include one or more sealing portions, or O-rings, **134** to aid in directing fluid flow. In some embodiments, the selector valve **130** may also include a user control portion **136**. The user control portion **136** may include, but is not limited to, a hex head, a lever, a button, and the like. In some embodiments of the fluid spray apparatus **100**, the selector valve **130** may be configured to be rotated to a first position, or first diverter structure arrangement, and to a second position, or second diverter structure arrangement, by a user.

As shown in FIGS. **18** and **21**, the selector valve **130** may be placed in a first position, or first diverter structure arrangement, wherein the first actuator **114** may communicate the inlet **102** with the first outlet **104** and the second actuator **116** may communicate the inlet with the second outlet **106**. In some embodiments, the selector valve **130** may be placed in the first position and the first actuator **114** may communicate the opening of the hose attachment barb **108** with the opening of the first nozzle **110** and the second actuator **116** may communicate the opening of the hose attachment barb with the opening of the second nozzle **112**.

As shown in FIGS. **19** and **22**, the selector valve **130** may be placed in a second position, or second diverter structure arrangement, wherein the first actuator **114** may communicate the inlet **102** with the second outlet **106** and the second actuator **116** may communicate the inlet with the first outlet **104**. In some embodiments, the selector valve **130** may be placed in the second position and the first actuator **114** may communicate the opening of the hose attachment barb **108** with the opening of the second nozzle **112** and the second actuator **116** may communicate the opening of the hose attachment barb with the opening of the first nozzle **110**.

The current disclosure also relates to a method of operating the fluid spray apparatus **100** including the fluid inlet **102** and first and second fluid outlets **104**, **106**. The method may include placing a diverter structure, including, but not limited to, the plurality of plugs **128** or the selector valve **130**, in a first arrangement. With the diverter structure in the first arrangement, the user may actuate the first actuator, or first trigger, **114** to flow fluid from the inlet **102** to the first outlet **104**. With the diverter structure in the first arrangement, the user may also actuate the second actuator, or

second trigger, **116** to flow fluid from the inlet **102** to the second outlet **106**. The user may place the diverter structure in a second arrangement. With the diverter structure in the second arrangement, the user may actuate the first actuator **114** to flow fluid from the inlet **102** to the second outlet **106**. With the diverter structure in the second arrangement, the user may also actuate the second actuator **116** to flow fluid from the inlet **102** to the first outlet **104**.

In one embodiment, the method of operating the fluid spray apparatus **100** may include removably placing the plurality of plugs **128** in the first arrangement to block a portion of the passage network **126** and placing the plurality of plugs in the second arrangement to block a different portion of the passage network.

In another embodiment, the method of operating the fluid spray apparatus **100** may include placing the selector valve **130** in a first position such that the diverter structure is in the first arrangement and a second position such that the diverter structure is in the second arrangement.

Referring to FIGS. **24** and **25**, an embodiment of a fluid spray apparatus **200** is illustrated. The fluid spray apparatus **200** shares many common elements and/or features with the fluid spray apparatus **100**. Accordingly, similar elements of the fluid spray apparatus **200** will be numbered similarly to those of the fluid spray apparatus **100**.

The fluid spray apparatus **200** includes a first inlet **102A**, a second inlet **102B**, a first outlet **104**, a second outlet **106**, a first actuator **114**, and a second actuator **116**. The first actuator **114** may be configured to communicate the first inlet **102A** with one of the first or second outlets **104**, **106**. The second actuator **116** may be configured to communicate the second inlet **102B** with a different one of the first or second outlets **104**, **106**. In certain optional embodiments, the fluid spray apparatus **200** includes at least one inlet, which may include the first inlet **102A** and the second inlet **102B**. A hose attachment barb **108** may be associated with each of the first and second inlets **102A**, **102B**.

The passageway network **126** of the fluid spray apparatus **200** may include the tube **127**. In accordance therewith, the second actuator **116** may be coupled to the different one of the first or second outlets **104**, **106** using the tube **127**, which may be positioned forward of the first and second actuators **114**, **116**. For example, the first and second actuators **114**, **116** may be positioned between the handle **118** and the tube **127**. The tube **127** may extend between a proximal end **210** of the handle **118** and a distal end **212** of the handle **118**.

The first and second actuators **114**, **116** may at least partially surround an exterior front side **214** of the handle **118**. The tube **127** may extend from the front side **214** such that the front side **214** faces the tube **127**. The first actuator **114** may be coupled to the handle **118** closer to the first and second outlets **104**, **106** than to the first and second inlets **102A**, **102B**. The second actuator **116** may be coupled to the handle **118** closer to the first and second inlets **102A**, **102B** than to the first and second outlets **104**, **106**.

As illustrated in FIG. **25**, the valve **115** associated with the second actuator **116** may be repositioned vertically, as compared with the fluid spray apparatus **100**. The spring **117** may be sandwiched between the valve **115** and the hose attachment barb **108**. The second inlet **102B** may be coupled to the tube **127** using at least one passageway **202**. The at least one passageway **202** may include a plug **204** configured to threadedly engage a portion of the at least one passageway **202**. The plug **204** may be optional in other embodiments, wherein the passageway **202** is cast during

manufacturing. The valve **115** may be actuated by the second actuator **116** using a pivotal member **206** coupled to the handle **118**.

Referring to FIGS. **26-28**, another embodiment of a fluid spray apparatus **300** is illustrated. The fluid spray apparatus **200** represents an integral version having first and second inlets **102A**, **102B** integrally formed in the handle **118**. The fluid spray apparatus **300** represents a retrofit version of the fluid spray apparatus **100** having first and second inlets **102A**, **102B**, however, the second inlet **102B** is incorporated into the handle **118** via an attachment, as discussed below. The fluid spray apparatus **300** shares many common elements and/or features with the fluid spray apparatus **100** and the fluid spray apparatus **200**. Accordingly, similar elements of the fluid spray apparatus **300** will be numbered similarly to those of the fluid spray apparatus **100** and the fluid spray apparatus **200**.

The fluid spray apparatus **300** may include a retrofit portion **302** that may be attached to the handle **118**. A section of the handle **118** of the fluid spray apparatus **100**, which is associated with placement of the retrofit portion **302**, may be machined to remove said section so that the retrofit portion **302** may be attached to the handle **118**. As illustrated in FIG. **29**, a rear portion **304** of the retrofit portion **302** may include a channel **306** configured to engage with a rail of the fluid spray apparatus **300**. The rail may be defined during the machining process. The rear portion **304** may further include an o-ring receptacle **308** configured to receive an o-ring **310** for sealing a portion of the passageway network **126** associated with the first actuator **114**.

The fluid spray apparatus **300** may include a passageway **202** and a pivotal member **206** similar to the fluid spray apparatus **200**. Each of the passageway **202**, the pivotal member **206**, the valve **115** and the spring **117** may be housed within the retrofit portion **302**. The second actuator **116** may be couplable to the retrofit portion **302** just as it was to the original handle **118**. Additionally, the retrofit portion **302** may define the distal end **212** of the handle **118**. The tube **127** may be coupled between the passageway **202** of the retrofit portion **302** and the proximal end **210** of the handle **118**.

Accordingly, the fluid spray apparatuses **200**, **300** advantageously provides a user with a single hand operated fluid spray apparatus that has the ability to spray two different liquids with the same or different patterns.

While the present disclosure has been described with particularity in relation to spraying herbicide, the present disclosure may also apply to any fluid spray apparatus used for any purpose including, but not limited to, distributing paint, detergents, pesticides, disinfectants, and the like.

This written description uses examples to disclose the invention and also to enable any person skilled in the art to practice the invention, including making and using any devices or systems. The patentable scope of the invention is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims if they have structural elements that do not differ from the literal language of the claims, or if they include equivalent structural elements with insubstantial differences from the literal language of the claims.

Although embodiments of the disclosure have been described using specific terms, such description is for illustrative purposes only. The words used are words of description rather than limitation. It is to be understood that changes and variations may be made by those of ordinary skill in the art without departing from the spirit or the scope of the

present disclosure, which is set forth in the following claims. In addition, it should be understood that aspects of the various embodiments may be interchanged in whole or in part. While specific uses for the subject matter of the disclosure have been exemplified, other uses are contemplated. Therefore, the spirit and scope of the appended claims should not be limited to the description of the versions contained herein.

What is claimed is:

- 1. A fluid spray apparatus comprising:
 - a body;
 - a first inlet external to the body;
 - a second inlet external to the body;
 - a first outlet;
 - a second outlet;
 - a first actuator configured to communicate the first inlet with one of the first or second outlets;
 - a second actuator configured to communicate the second inlet with a different one of the first or second outlets;
 - a passage network positioned within the body and communicating the first and second actuators with the first and second outlets; and
 - a diverter structure disposed in the passage network and including:
 - a first diverter structure arrangement wherein the first actuator communicates the first inlet with the first outlet and the second actuator communicates the second inlet with the second outlet; and
 - a second diverter structure arrangement wherein the first actuator communicates the first inlet with the second outlet and the second actuator communicates the second inlet with the first outlet.
- 2. The fluid spray apparatus of claim 1, wherein: the diverter structure includes a plurality of plugs removably disposed in one of a plurality of positions blocking a portion of the passage network.
- 3. The fluid spray apparatus of claim 1, wherein: the diverter structure includes a selector valve.
- 4. The fluid spray apparatus of claim 1, wherein: the first diverter structure arrangement and the second diverter structure arrangement are mutually exclusive.
- 5. The fluid spray apparatus of claim 1, wherein: the first outlet and the second outlet are each configured to receive a variety of fluid spray nozzles.
- 6. The fluid spray apparatus of claim 1, wherein: the first outlet includes a diffuse spray nozzle and the second outlet includes a solid stream nozzle.
- 7. The fluid spray apparatus of claim 1, wherein: at least one of the first outlet and the second outlet includes an adjustable spray nozzle.
- 8. The fluid spray apparatus of claim 1, wherein: the second actuator is coupled to the different one of the first or second outlets using an exterior tube positioned forward of the first and second actuators.
- 9. The fluid spray apparatus of claim 1, further comprising:
 - a handle; and
 - the first and second actuators hingedly and opposingly disposed on the handle.
- 10. The fluid spray apparatus of claim 9, wherein: the first and second actuators at least partially surround a front side of the handle.

- 11. The fluid spray apparatus of claim 9, wherein:
 - the first actuator is hingedly coupled to the handle closer to the first and second outlets than to the first and second inlets; and
 - the second actuator is hingedly coupled to the handle closer to the first and second inlets than to the first and second outlets.
- 12. The fluid spray apparatus of claim 1, further comprising:
 - a handle; and
 - the first and second actuators are coupled to and at least partially surround an exterior of the handle.
- 13. A fluid spray apparatus comprising:
 - at least one inlet;
 - a first outlet;
 - a second outlet;
 - a first actuator configured to communicate the at least one inlet with one of the first or second outlets;
 - a second actuator configured to communicate the at least one inlet with a different one of the first or second outlets;
 - a passage network communicating the first and second actuators with the first and second outlets; and
 - a diverter structure disposed in the passage network and including:
 - a first diverter structure arrangement wherein the first actuator communicates the at least one inlet with the first outlet and the second actuator communicates the at least one inlet with the second outlet; and
 - a second diverter structure arrangement wherein the first actuator communicates the at least one inlet with the second outlet and the second actuator communicates the at least one inlet with the first outlet.
- 14. The fluid spray apparatus of claim 13, wherein: the at least one inlet includes a first inlet and a second inlet.
- 15. The fluid spray apparatus of claim 13, wherein: the second actuator is coupled to the different one of the first or second outlets using an exterior tube positioned forward of the first and second actuators.
- 16. The fluid spray apparatus of claim 13, further comprising:
 - a handle; and
 - the first and second actuators are hingedly coupled to and at least partially surround an exterior front side of the handle.
- 17. The fluid spray apparatus of claim 16, further comprising:
 - an exterior tube configured to couple the at least one inlet to one of the first or second outlets using the second actuator; and
 - the exterior tube extends from a same side of the handle as the first and second actuators.
- 18. The fluid spray apparatus of claim 13, wherein:
 - the first actuator includes a first trigger and the second actuator includes a second trigger; and
 - the first and second triggers are configured to be aligned with each other and opposed to each other.
- 19. The fluid spray apparatus of claim 13, wherein:
 - each of the first and second actuators is further configured to prevent communication between the at least one inlet and the first and second outlets when the actuators are unactuated.

* * * * *